

# KORAMONT

Fixing and mounting of RADIK and KORALUX radiators





The new plant KORADO is the most modern factory for the production of radiators in Europe thanks to its up-to date production facility, technology and organization. Its modern and sophisticated organization in the area of 30 000 m<sup>2</sup> enables further increases of production capacity whenever needed.

The choice of all technology was driven by the maximum effort to ensure environment protection inside the factory as well as in its surroundings.

KORADO, a.s. obtained the ISO 9001 quality certificate in 1997 and currently already holds the ISO 9001:2015



e-mail: [info@korado.cz](mailto:info@korado.cz)



[www.korado.com](http://www.korado.com)



Bří Hubálků 869  
560 02 Česká Třebová  
Czech Republic

# TABLE OF CONTENTS

---




FIXING OF RADIK STEEL PANEL RADIATORS - WALL BRACKETS . . . . .	4
FIXING OF RADIK STEEL PANEL RADIATORS - STAND BRACKETS . . . . .	9
FIXING OF RADIK STEEL PANEL RADIATORS - DRILL-IN BRACKETS . . . . .	14
FIXING OF KORALUX TOWEL RAIL RADIATORS - WALL BRACKETS . . . . .	16
MOUNTING OF RADIK STEEL PANEL RADIATORS - DATA FOR FIXING . . . . .	20
SUMMARY OF FIXING TECHNOLOGY FOR RADIK RADIATORS . . . . .	22


# FIXING OF RADIK STEEL PANEL RADIATORS

## WALL BRACKETS

### Simple wall bracket

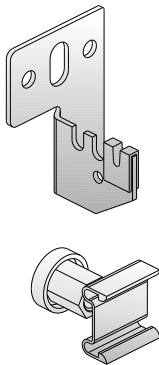


- designed for all models and types with welded fixing hangers except for type 10 of all RADIK models
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 40 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **500 N**

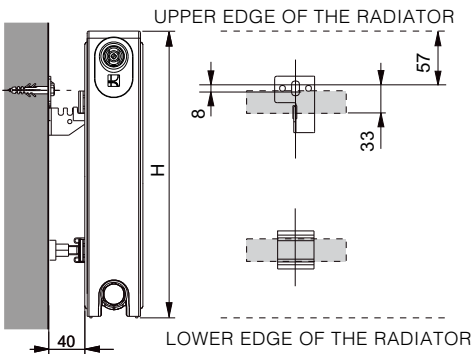


**Set contains:** 2 x bracket, 2 x support, screws 8 x 60 mm, dowel plugs Ø 10 mm

Type	H [mm]	Order number
Simple wall bracket	300 ÷ 900	Z-U320

### Simple wall bracket - angled

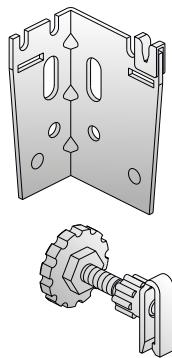

- designed for all models and types with welded fixing hangers
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 54 and 36 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **700 N**

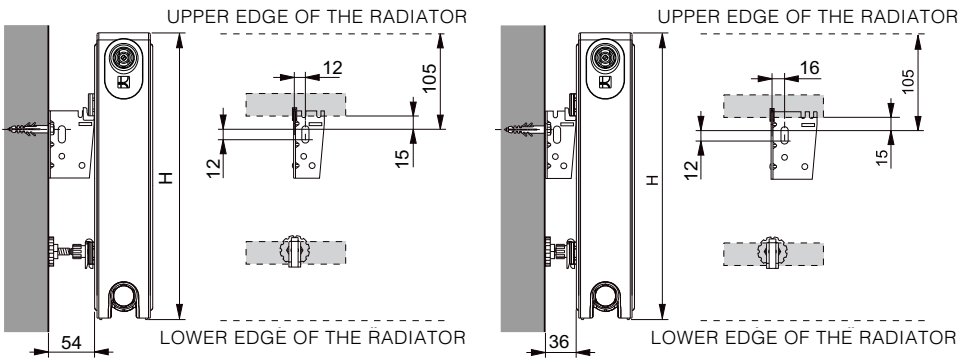

**Set contains:** 1 x right and left bracket, 2 x support, screws 8 x 60 mm, dowel plugs Ø 10 mm

Type	H [mm]	Order number
Simple wall bracket - angled	300 ÷ 900	Z-U300




# FIXING OF **RADIK** STEEL PANEL RADIATORS




## WALL BRACKETS

### Double wall bracket



- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- selection dependent on the height of the radiator **H**
- metal parts painted in white
- enables mounting on the wall at the distance of **D = 43 and 23 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **700 N**

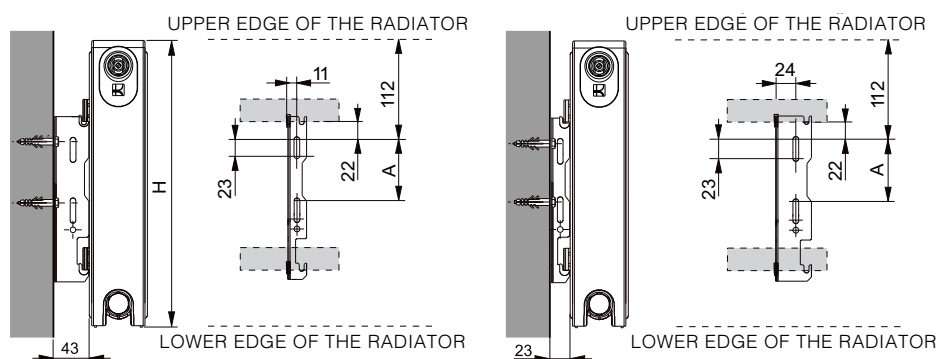


**Set contains:** 1 x right and left bracket, screws 6 x 50 mm, dowel plugs Ø 8 mm

Type	H [mm]	A [mm]	Order number
Double wall bracket	300	-	Z-U562
	400	141	Z-U563
	500	241	Z-U564
	600	341	Z-U565
	700	441	Z-U567
	900	641	Z-U566

### Double wall bracket MB



- designed for all models and types with welded hangers except for type 10 of all models of VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- equipped with a safety lock against lifting of the radiator
- selection dependent on the height of the radiator **H**
- metal parts zinc-coated
- enables mounting on the wall at the distance **D = 44 and 23 mm** from the wall
- used to concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **750 N**

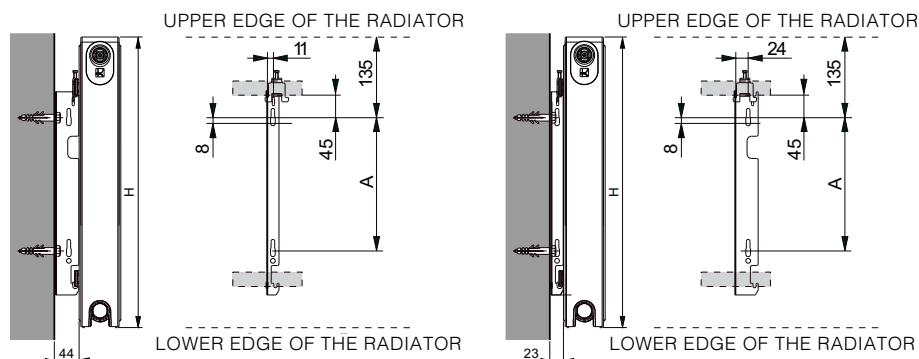

**Set contains:** 2 x brackets, screws 8 x 60 mm, dowels Ø 10 mm


Note: The maximum horizontal load in cross direction (perpendicular to the wall) **300 N**

Type	H [mm]	A [mm]	Order number
Double wall bracket H = 300 MB	300	-	Z-U521
Double wall bracket H = 400 MB	400	136	Z-U522
Double wall bracket H = 500 MB	500	236	Z-U523
Double wall bracket H = 600 MB	600	336	Z-U524
Double wall bracket H = 700 MB	700	436	Z-U525
Double wall bracket H = 900 MB	900	636	Z-U526


# FIXING OF RADIK STEEL PANEL RADIATORS

## WALL BRACKETS

### Compact bracket




- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 43 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **2700 N**

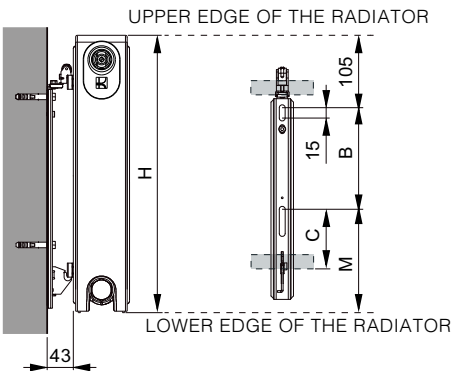


**Set contains:** 2 x bracket, screws 8 x 60 mm, dowel plugs Ø 10 mm  
Note: Meets the class 3 according to the VDI6036 safety standard.

Type	H [mm]	B [mm]	C [mm]	M [mm]	Order number
Compact bracket	300	-	131	195	Z-U571
	400	147	84	148	Z-U572
	500	247	84	148	Z-U573
	600	347	84	148	Z-U574
	700	447	84	148	Z-U577
	900	647	84	148	Z-U575

### Split bracket Plus



- designed mainly for the models without welded fixing hangers
- can be used also for all other radiator models and types with welded hangers except for types 10 and 11 of all models
- for radiators 1800 mm long and longer it is necessary to use three brackets, the third one shall be located in the middle of the radiator length
- selection not dependent on the radiator height **H**
- zinc-coated metal parts, top grill holder painted in white
- secures the radiator against lifting
- enables mounting on the wall at a distance of **D = 37 ÷ 47 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1000 N**

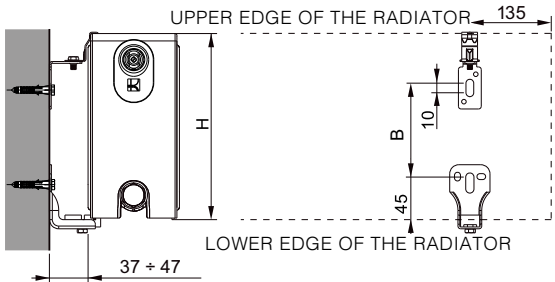

H [mm]	B [mm]
200	100
300	200
400	300
500	400
600	500
700	600
900	800

**Set contains:** 2 x bracket (Z-U556) or 3 x bracket (Z-U557), screws 8 x 60 mm, dowel plugs Ø 10 mm


Type	H [mm]	Set contains	Order number
Split Bracket Plus – set 2 pcs	200 ÷ 900	2pcs	Z-U556
Split Bracket Plus – set 3 pcs	200 ÷ 900	3pcs	Z-U557




# FIXING OF **RADIK** STEEL PANEL RADIATORS

## WALL BRACKETS

### Compact bracket Plus



- designed mainly for radiators without welded fixing hangers
- can be also used for all other models and types with welded fixing hangers except for type 10 and 11 of all models
- for radiators 1800 mm long and longer, you must use three brackets, the third is positioned in the middle
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts, grill holder painted in white
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 30 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1500 N**

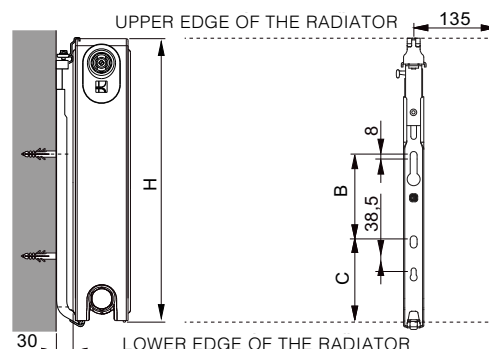


**Set contains:** 2 x bracket, screws 7 x 65 mm, dowel plugs Ø 10 mm

Note: Maximum permitted horizontal load on the bracket in transverse direction (perpendicularly to the wall) is **400 N**


Note: Meets the class 2 according to the VDI6036 safety standard.

Type	H [mm]	B [mm]	C [mm]	Order number
Compact bracket Plus	300	74	105	Z-U631
	400	174	105	Z-U632
	500	274	105	Z-U633
	600	374	105	Z-U634
	700	474	105	Z-U635
	900	674	105	Z-U636

### Split bracket VERTIKAL



- designed mainly for panel radiators RADIK and design radiators KORATHERM with welded fixing hangers and with minimum height **H = 500 mm**
- zinc-coated metal parts
- equipped with a safety catch to prevent the radiator from lifting and move
- enables mounting on the wall at a distance of **D = 40 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1500 N**

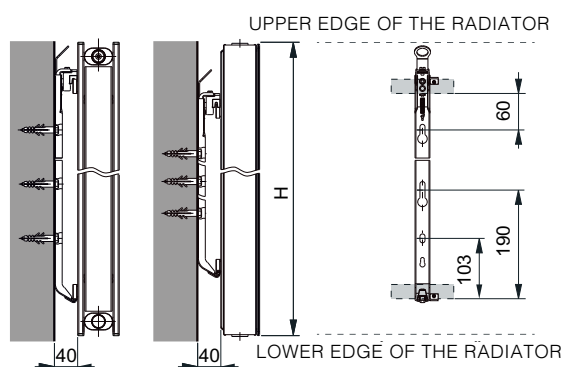

**Set contains:** 2 x brackets, screws 7 x 60 mm, dowel plugs Ø 10 mm, 4 x safety catch against lifting and move

Note: Maximum permitted horizontal load on the bracket in longitudinal and transverse direction is **250 N**


Meets the class 2 according to the VDI6036 the safety standard.

Type	H [mm]	Order number
Split bracket VERTIKAL	minimum 500	Z-U558


# FIXING OF RADIK STEEL PANEL RADIATORS

## WALL BRACKETS

### Compact bracket P2




- designed mainly for radiators without welded fixing hangers
- can be also used for all other models and types with welded fixing hangers except for type 10 and 11 of all models
- enables two ways of fixing the radiator (under or over the top grill)
- for radiators 1800 mm long and longer, you must use three brackets, the third is positioned in the middle
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts, grill holder painted in white
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 26 and 36 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1200 N**

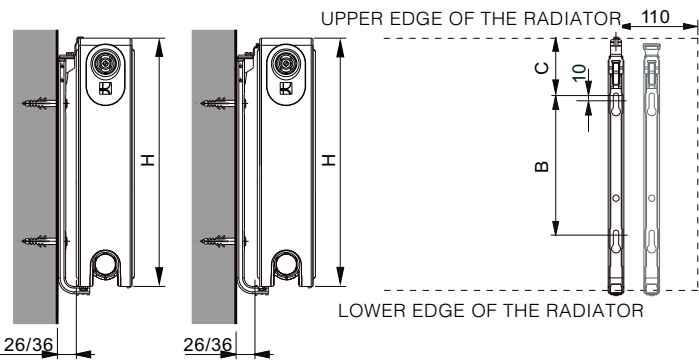


**Set contains:** 2 x bracket, screws 8 x 50 mm, dowel plugs Ø 10 mm  
Note: When using the safety set P2 (Z-U537) it meets the class 3 according to the VDI6036 safety standard.

Type	H [mm]	B [mm]	C [mm]	Order number
Compact bracket P2 H = 300	300	119	94	Z-U531
Compact bracket P2 H = 400	400	219	94	Z-U532
Compact bracket P2 H = 500	500	319	94	Z-U533
Compact bracket P2 H = 600	600	419	94	Z-U534
Compact bracket P2 H = 700	700	519	94	Z-U535
Compact bracket P2 H = 900	900	719	94	Z-U536

### Safety set P2



- accessories to the Compact bracket P2
- prevents longitudinal move of the radiator
- mainly designed for radiators without welded fixing hangers

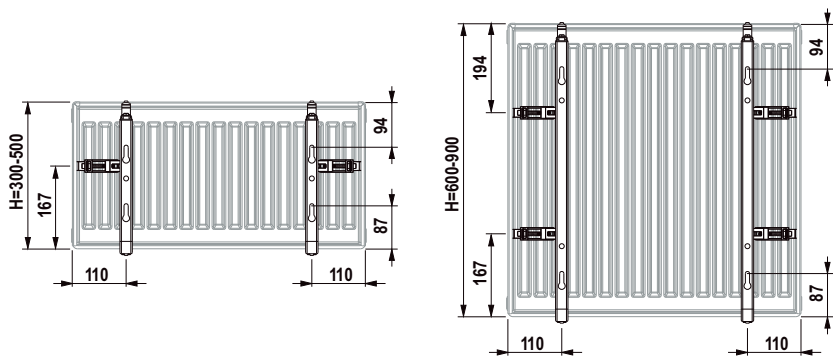

**The set includes:** 2 x brackets, screws 6 x 50 mm, dowels Ø 8 mm  
Note: For units with a height of 600-900 mm, 4 brackets are recommended


Type	Order number
Safety set P2	Z-U537




# FIXING OF **RADIK** STEEL PANEL RADIATORS

## STAND BRACKETS

### Internal stand bracket – universal



- designed for all models except for models RADIK VKM8 and COMBI VK
- suitable for all types except for type 10
- radiator panel and convector fins are used for fixing the radiator
- assembled by manufacturer
- selection not dependent on the height of the radiator **H**
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1800 N**

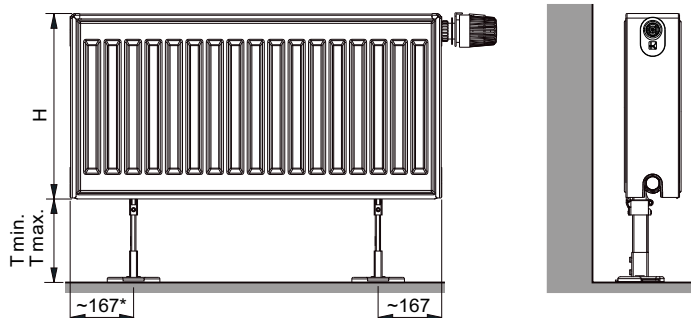

\*100 mm is valid  
for radiator  
L = 400 mm

**Set contains:** 1 x bracket

Note: meets class 3 according to the VDI6036 safety standard ( $T_{max} = 150$  mm)

RADIK - number of brackets Z-U331				
Height H = 300 ÷ 600		Height H = 700 ÷ 900		
Lenght L	Number of brackets	Lenght L	Number of brackets	
400 ÷ 1800	2	400 ÷ 1200	2	
2000 ÷ 2300	3	1400 ÷ 1800	3	
2600 ÷ 3000	4	2000 ÷ 3000	4	


  

Type	H [mm]	T min [mm]	T max [mm]	Order number
Internal stand bracket – universal	300	150	150	Z-U331
	400 ÷ 900	100		


# FIXING OF **RADIK** STEEL PANEL RADIATORS

## STAND BRACKETS

### External stand bracket



- designed for all models and types with welded fixing hangers except for type 10 of models VKM8
- welded fixing hangers are used for fixing the radiator
- ordering requires 2 separate items (set + load-bearing profile) and their assembly when fixing the radiator
- selection of the load-bearing profile is dependent on the height of the radiator **H**
- visible metal parts painted in white, other parts zinc-coated
- maximum permitted vertical load on the bracket is **1000 N**

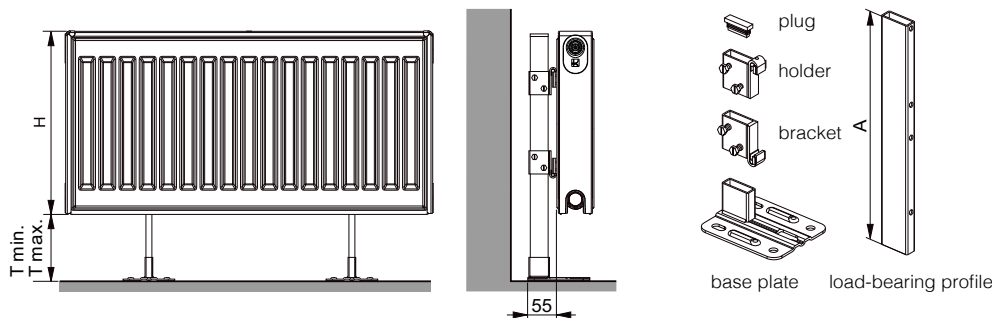


**Set Z-U210 contains:** 1 x base plate, bracket, holder and plug, for the completion of the bracket, it is necessary to order a load-bearing profile according to the height of the radiator H.


Note: modification of the length of the load-bearing profile can allow you to achieve different  $T_{min}$  and  $T_{max}$  values

Type	H [mm]	A [mm]	T min [mm]	T max [mm]	Order number
External stand bracket	300 ÷ 900	-	-	-	Z-U210
Load-bearing profile	300	460	170	235	Z-U220
Load-bearing profile	400	560	170	235	Z-U230
Load-bearing profile	500	660	170	235	Z-U240
Load-bearing profile	600	760	170	235	Z-U250
Load-bearing profile	700	860	170	235	Z-U255
Load-bearing profile	900	1060	170	235	Z-U260

### Stand brackets RADIK for types 22 and 33

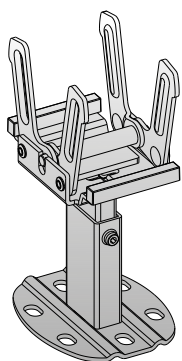

- designed for all models except for PLAN, LINE and COMBI VK versions
- in case of VKM8 models use only from the length of 600 mm
- designed for models 22, 33 and models 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of  $H_{max} = 600$  mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **2000 N**

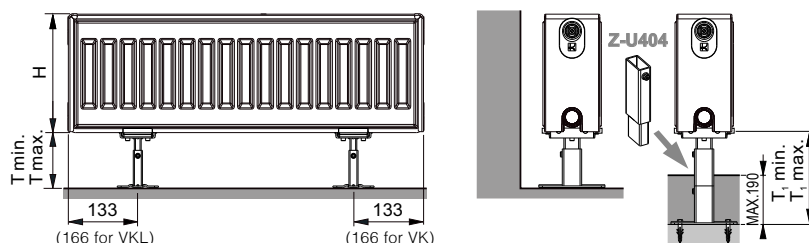

**Set contains:** 1x bracket, all components for fixing, directions for use


Number of brackets Z-U403					
Lenght L	400 ÷ 1600	1800 ÷ 2300	2600 ÷ 3000		
Number of brackets	2	3	4		
Type	H [mm]	T min [mm]	T max [mm]	Order number	
Stand bracket RADIK for types 22 and 33	200 ÷ 600	120	170	Z-U403	
Stand bracket RADIK for types 22 and 33 with extension	200 ÷ 600	220	270	Z-U403 Z-U404	




# FIXING OF **RADIK** STEEL PANEL RADIATORS

## STAND BRACKETS

### Stand bracket W RADIK type 20, 21 (low)




- designed for all models except for models COMBI VK
- in case of VKM8 models use only from the length of 600 mm
- designed for types 20 and 21
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of  $H_{max} = 900$  mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

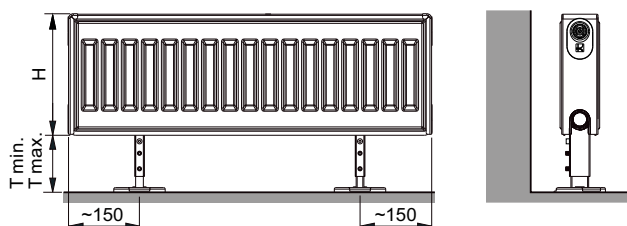


**Set contains:** 1x bracket, directions for use

Number of brackets Z-U391				
Lenght L	400 ÷ 1600	1800 ÷ 2300	2600 ÷ 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket W RADIK type 20, 21	200 ÷ 900	120	150	Z-U391

### Stand bracket W RADIK type 22, 33 (low)



- designed for all models except for models COMBI VK
- in case of VKM8 models use only from the length of 600 mm
- designed for types 22, 33 and types 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of  $H_{max} = 900$  mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

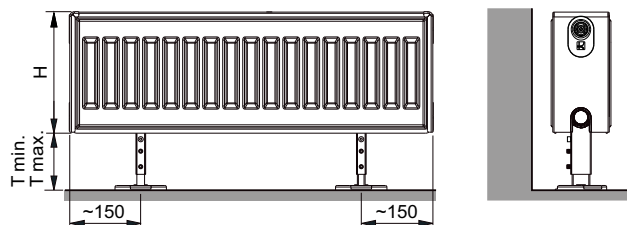


**Set contains:** 1x bracket, directions for use

Number of brackets Z-U392				
Lenght L	400 ÷ 1600	1800 ÷ 2300	2600 ÷ 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket W RADIK type 22, 33 (low)	200 ÷ 900	120	150	Z-U392


# FIXING OF **RADIK** STEEL PANEL RADIATORS

## STAND BRACKETS

### Stand bracket W RADIK type 22, 33 (high)




- designed for all models except for models COMBI VK
- in case of VKM8 models use only from the length of 600 mm
- designed for types 22, 33 and types 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of  $H_{max} = 900$  mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

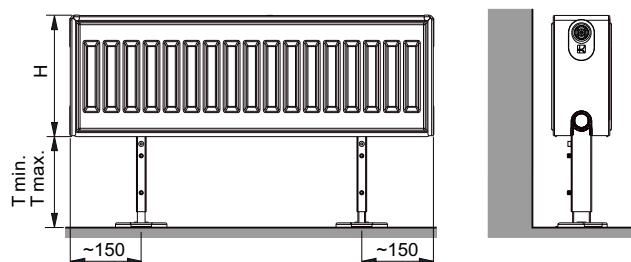


**Set contains:** 1x bracket, directions for use

Number of brackets Z-U400				
Lenght L	400 ÷ 1600	1800 ÷ 2300	2600 ÷ 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket W RADIK type 22, 33 (high)	200 ÷ 900	165	320	Z-U400

### Stand bracket for types 20, 21 (high)



- designed for all models except for models COMBI VK
- in case of VKM8 models use only from the length of 600 mm
- designed for types 20 and 21
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of  $H_{max} = 900$  mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

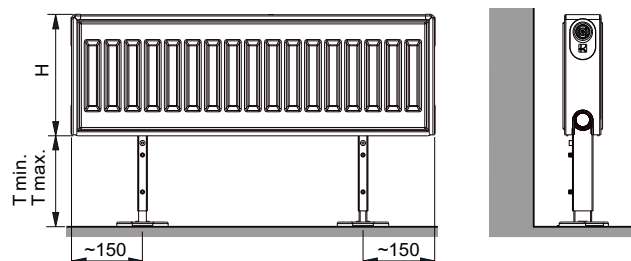


**Set contains:** 1x bracket, directions for use

Number of brackets Z-U390				
Lenght L	400 ÷ 1600	1800 ÷ 2300	2600 ÷ 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket for types 20, 21	200 ÷ 900	165	320	Z-U390







## Accessories for stand brackets

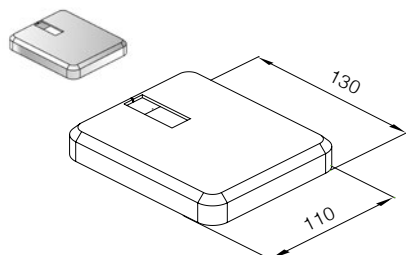


**Z-U440**  
Cover for the base plate  
for the external bracket  
(Z-U210)




**Z-U405**  
Cover for the base plate  
for the stand bracket MB  
(Z-U403)




**Z-U404**  
Extension piece for stand  
bracket MB (Z-U403)

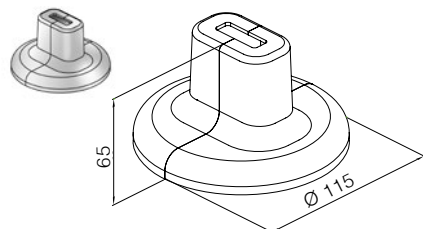

**Z-U450**  
Cover for the base plate  
for the internal bracket -  
universal (Z-U331)



**Z-U460**  
Cover for the load-bearing profile  
(Z-U331, Z-U390, Z-U391,  
Z-U392, Z-U400)




**Z-U393**  
Cover for the base plate  
for the stand bracket W  
(Z-U390, Z-U391, Z-U392,  
Z-U400)

Type	Packing	Order number
Cover for the base plate for the external bracket (Z-U210)	1 pc	Z-U440
Cover for the base plate for the internal bracket (Z-U331)	1 pc	Z-U450
Cover for the load-bearing profile (Z-U331, Z-U390, Z-U391, Z-U392, Z-U400)	1 pc	Z-U460
Cover for the base plate for the stand bracket W (Z-U390, Z-U391, Z-U392, Z-U400)	1 pc	Z-U393
Cover for the base plate for the stand bracket MB (Z-U403)	1 pc	Z-U405
Extension piece for stand bracket MB (Z-U403)	1 pc	Z-U404


# FIXING OF RADIK STEEL PANEL RADIATORS DRILL-IN BRACKETS

## DRILL-IN BRACKETS

### Drill-in bracket 15/120




- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 45 ÷ 50 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- $\varnothing$  16 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **700 N**

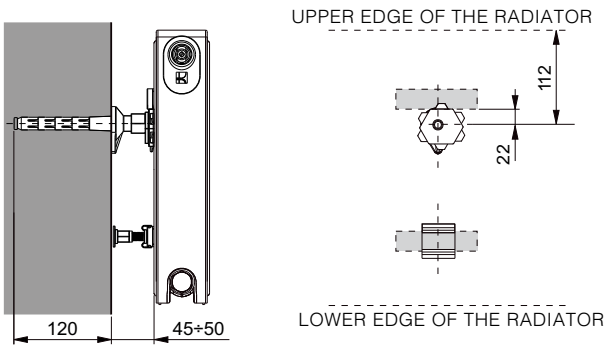


**Set contains:** 1 x bracket, 1 x support, 2 x spacer ring  
Note: meets class 2 according to the VDI6036 safety standard.

Type	H [mm]	Order number
Drill-in bracket 15/120	300 ÷ 900	Z-U140

### Drill-in bracket 15/100/70



- designed mainly for type 10 of all models with welded fixing hangers
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 65 ÷ 70 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- $\varnothing$  16 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **400 N**

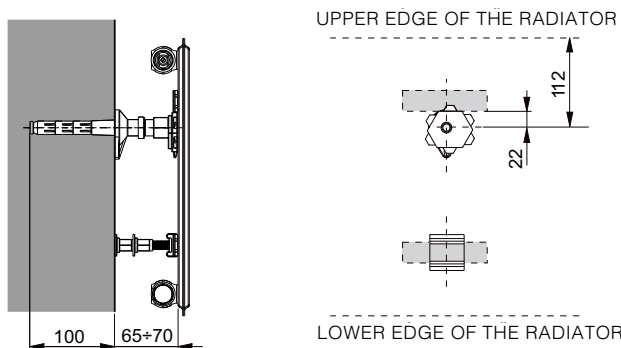

**Set contains:** 1 x bracket, 1 x support, 2 x spacer ring  
Note: meets class 2 according to the VDI6036 safety standard.


Type	H [mm]	Order number
Drill-in bracket 15/100/70	300 ÷ 900	Z-U141




# FIXING OF **RADIK** STEEL PANEL RADIATORS

## DRILL-IN BRACKETS

### Drill-in bracket 18/120




- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 35 ÷ 65 mm** from the wall, at a distance of **D = 65 ÷ 80 mm** a bracket must also be used on the lower pair of fixing hangers (instead of a support)
- used for masonry from perforated and solid bricks and porous concrete
- $\varnothing$  18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **1000 N** at **D = 50 mm**

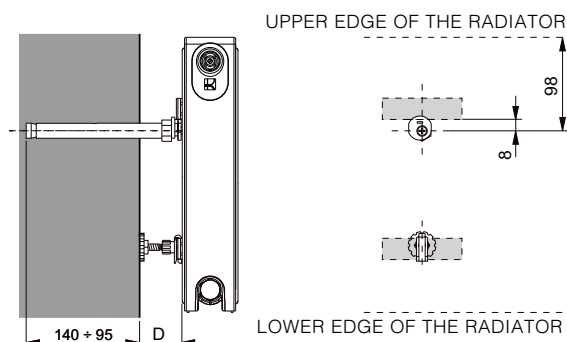


**Set contains:** 2 x bracket, 2 x support

Type	H [mm]	Order number
Drill-in bracket 18/120	300 ÷ 900	Z-U144

### Drill-in bracket 18/110/100



- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 70 ÷ 100 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- $\varnothing$  18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **500 N** at **D = 100 mm**

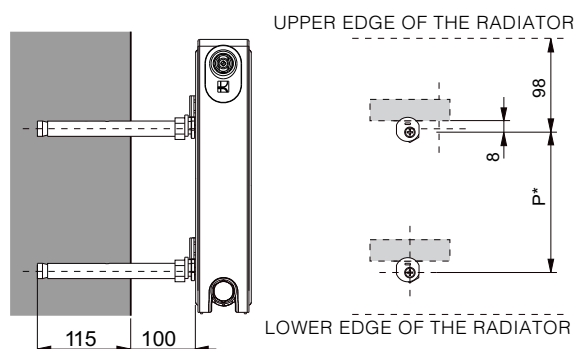

**Set contains:** 2 x bracket


\* see page 20

Type	H [mm]	Order number
Drill-in bracket 18/110/100	300 ÷ 900	Z-U290


# FIXING OF KORALUX RADIATORS

## WALL BRACKETS - MAX, COMFORT, CLASSIC

### Wall brackets KORALUX MAX, COMFORT, CLASSIC - General information



- universal set designed for fixing of both radiators with straight tubes (LINEAR design) and with curved tubes (RONDO design) thanks to a special component (see position **1**)
- the set of wall brackets is delivered according to the model of radiator, in three colours - white, black or chrome
- set contains:
  - 4 x brackets
  - all components for fitting to the wall
  - air vent
  - blanking plug
- tubular radiator fixed to the wall at four points
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry

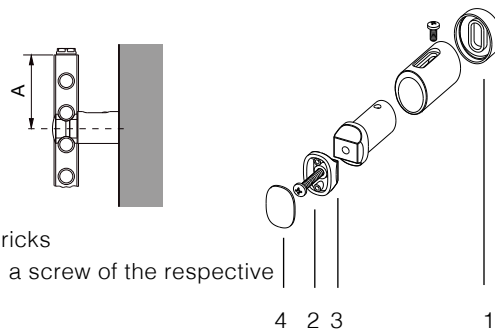


### Wall brackets KORALUX MAX, COMFORT, CLASSIC - Fitting

- position the bracket between the second and third pipe from the top and the bottom (level **A**)
- carefully tighten the screw (position **2**) so the compressed part of the bracket is not deformed (position **3**) and the cover (position **4**) fits perfectly into the compressed part of the bracket
- we recommend the distance of the bracket centre on the wall from the side edge of the radiator according to the dimension **B**


### Wall brackets KORALUX MAX, COMFORT, CLASSIC - Range

- three versions of the mounting sets can be delivered
- the choice of the type of the bracket depends on distance between the tubes
  - **Mounting set Ø24/35** - designed for use with all models of KORALUX MAX towel rail radiators
  - **Mounting set Ø24/40** - designed for use with all models of KORALUX COMFORT towel rail radiators
  - **Mounting set Ø20/40** - designed for use with all models of KORALUX CLASSIC towel rail radiators

KLM, KLMM, KLC, KLCM, KLT, KLTM, KLME, KLCE, KLTE, KLME, KLCE, KLTE, KLME, KLCE, KLTE




KRM, KRMM, KRC, KRCM, KRT, KRTM, KRME, KRCE, KRTE, KRME, KRCE, KRTE



**KLMM, KRMM, KLTM, KRTM, KLCM, KRCM** - models with bottom middle connection with connecting pitch of 50 mm

**KLME, KRME, KLTE, KRTE, KLCE, KRCE, KLME, KRME, KLCE, KRCE, KLTE, KRTE** - direct electric radiators, not connected to the heating system

### Mounting set Ø24/35 - MAX



Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450	600	750
LINEAR MAX	KLM	24	83	70	71 ÷ 88	15	-	-	-
LINEAR MAX-M	KLMM	24	83	70	71 ÷ 88	15	71 ÷ 88	71 ÷ 88	71 ÷ 88
LINEAR MAX-E	KLME	24	83	70	71 ÷ 88	15	-	-	-
LINEAR MAX-ER	KLME	24	83	70	71 ÷ 88	15	-	-	-
RONDO MAX	KRM	24	83	85	65 ÷ 81	15	-	-	-
RONDO MAX-M	KRMM	24	83	85	65 ÷ 81	15	94 ÷ 110	100 ÷ 116	104 ÷ 120
RONDO MAX-E	KRME	24	83	85	65 ÷ 81	15	-	-	-
RONDO MAX-ER	KRME	24	83	85	65 ÷ 81	15	-	-	-

### Information for ordering


Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR MAX	KLM	24	Mounting set Ø24/35	White	Z-U512
LINEAR MAX-M	KLMM	24			
LINEAR MAX-E	KLME	24			
LINEAR MAX - ER	KLME	24			
RONDO MAX	KRM	24		Black	Z-U512-58
RONDO MAX-M	KRMM	24			
RONDO MAX-E	KRME	24			
RONDO MAX-ER	KRME	24			

# FIXING OF KORALUX RADIATORS



WALL BRACKETS - MAX, COMFORT, CLASSIC

## Mounting set Ø24/40 - COMFORT




Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450/500	600	750
LINEAR COMFORT	KLT	24	90	70	73 ÷ 92	15	-	-	-
LINEAR COMFORT-M	KLTM	24	90	70	73 ÷ 92	15	73 ÷ 92	73 ÷ 92	73 ÷ 92
LINEAR COMFORT-E	KLTE	24	90	70	73 ÷ 92	15	-	-	-
LINEAR COMFORT-ER	KLTER	24	90	70	73 ÷ 92	15	-	-	-
RONDO COMFORT	KRT	24	90	85	67 ÷ 85	15	-	-	-
RONDO COMFORT-M	KRTM	24	90	85	67 ÷ 85	15	96 ÷ 114	103 ÷ 121	104 ÷ 122
RONDO COMFORT-E	KRTE	24	90	85	67 ÷ 85	15	-	-	-
RONDO COMFORT-ER	KRTER	24	90	85	67 ÷ 85	15	-	-	-

### Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR COMFORT	KLT	24	Mounting set Ø24/40	White	Z-U594
LINEAR COMFORT-M	KLTM	24		White	Z-U594
LINEAR COMFORT-E	KLTE	24		White	Z-U594
LINEAR COMFORT-ER	KLTER	24		White	Z-U594
RONDO COMFORT	KRT	24		Chrome	Z-U595
RONDO COMFORT-M	KRTM	24		Chrome	Z-U595
RONDO COMFORT-E	KRTE	24		Black	Z-U594-58
RONDO COMFORT-ER	KRTER	24		Black	Z-U594-58

## Mounting set Ø20/40 - CLASSIC




Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]			
							450	500	600	750
LINEAR CLASSIC	KLC	20	90	70	71 ÷ 90	15	-	-	-	-
LINEAR CLASSIC-M	KLCM	20	90	70	71 ÷ 90	15	71 ÷ 90	71 ÷ 90	71 ÷ 90	71 ÷ 90
LINEAR CLASSIC-E	KLCE	20	90	70	71 ÷ 90	15	-	-	-	-
LINEAR CLASSIC-ER	KLCER	20	90	70	71 ÷ 90	15	-	-	-	-
RONDO CLASSIC	KRC	20	90	85	64 ÷ 82	15	-	-	-	-
RONDO CLASSIC-M	KRCM	20	90	85	64 ÷ 82	15	93 ÷ 111	94 ÷ 112	100 ÷ 118	104 ÷ 122
RONDO CLASSIC-E	KRCE	20	90	85	64 ÷ 82	15	-	-	-	-
RONDO CLASSIC-ER	KRCER	20	90	85	64 ÷ 82	15	-	-	-	-

### Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR CLASSIC	KLC	20	Mounting set Ø20/40	White	Z-U592
LINEAR CLASSIC-M	KLCM	20		White	Z-U592
LINEAR CLASSIC-E	KLCE	20		White	Z-U592
LINEAR CLASSIC-ER	KLCER	20		White	Z-U592
RONDO CLASSIC	KRC	20		Chrome	Z-U593
RONDO CLASSIC-M	KRCM	20		Chrome	Z-U593
RONDO CLASSIC-E	KRCE	20		Black	Z-U592-58
RONDO CLASSIC-ER	KRCER	20		Black	Z-U592-58

## Mounting set Ø22/40 - EXCLUSIVE



Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450	600	750
LINEAR EXCLUSIVE - M	KLXM	22	90	70	75 ÷ 90	22	75 ÷ 90	75 ÷ 90	75 ÷ 90
RONDO EXCLUSIVE - M	KRXM	22	90	90	60 ÷ 75	22	80 ÷ 95	90 ÷ 105	110 ÷ 125


### Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR EXCLUSIVE - M	KLXM	22	Mounting set Ø22/40	Chrome	Z-U598
RONDO EXCLUSIVE - M	KRXM	22		Chrome	Z-U599


# FIXING OF KORALUX RADIATORS

## WALL BRACKETS - STANDARD

### Mounting set Ø20 universal - STANDARD



- designed for use with all models of KORALUX STANDARD towel rail radiators
- tubular radiator fixed to the wall at four points
- the set of wall brackets is delivered according to the model of radiator, in two colours - white or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
  - 4 x brackets
  - all components for fitting to the wall
  - air vent
  - blanking plug

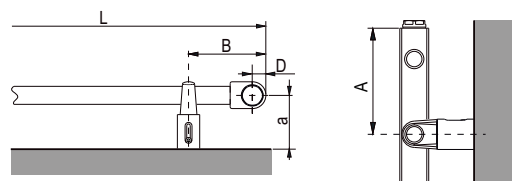


Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]
STANDARD	KS	20	110	70	72 ÷ 81	15


### Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
STANDARD	KS	20	Mounting set Ø20	White Chrome	Z-U588 Z-U589

### Room divider set KORALUX

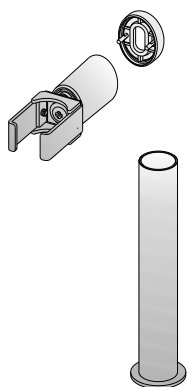

- designed for all KORALUX radiators
- tubular radiator is in position perpendicularly to the wall
- tubular radiator fixed to the wall at two points and to the floor at one point
- in two colours – white or chrome
- set contains:
  - 2 x wall brackets
  - 1 x stand bracket
  - all components for fitting

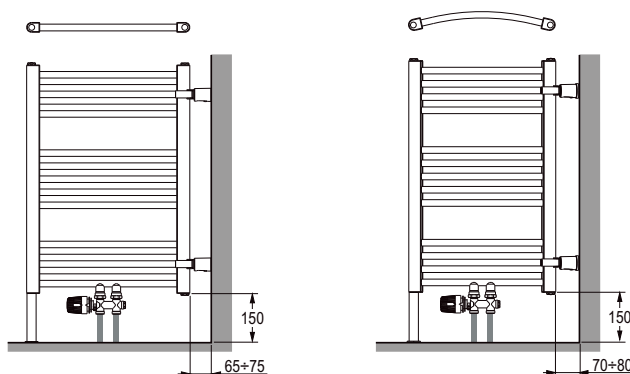


Model	Type of set	Colour	Order number
LINEAR CLASSIC, LINEAR CLASSIC - M, LINEAR CLASSIC - E, LINEAR CLASSIC - ER	Room divider set KORALUX 40x30	white chrome	Z-U168 Z-U169
RONDO CLASSIC, RONDO CLASSIC - M, RONDO CLASSIC - E, RONDO CLASSIC - ER			
STANDARD	Room divider set KORALUX 41x35	white chrome	Z-U170 Z-U171
LINEAR EXCLUSIVE - M, RONDO EXCLUSIVE - M			
LINEAR COMFORT, LINEAR COMFORT - M, LINEAR COMFORT - E, LINEAR COMFORT - ER	Room divider set KORALUX 41x35	white chrome	Z-U170 Z-U171
RONDO COMFORT, RONDO COMFORT - M, RONDO COMFORT - E, RONDO COMFORT - ER			
LINEAR MAX, LINEAR MAX - M, LINEAR MAX - E, LINEAR MAX - ER	Room divider set KORALUX 41x35	white chrome	Z-U170 Z-U171
RONDO MAX, RONDO MAX - M, RONDO MAX - E, RONDO MAX - ER			



# FIXING OF DESIGN RADIATORS KORATHERM AQUAPANEL



## Mounting set AQUAPANEL (long)



- designed for use with all models of KORATHERM AQUAPANEL towel rail radiators
- design radiator fixed to the wall at four points
- the set of wall brackets is delivered according to the model of radiator, in three colours - white, black or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
  - 4 x brackets
  - all components for fitting to the wall
  - air vent
  - blanking plug

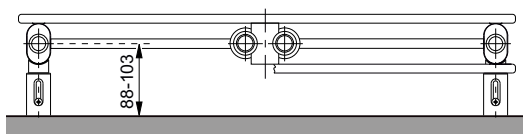


### Information for ordering



Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
AQUAPANEL, AQUAPANEL - E, AQUAPANEL - ER	K20A	20	Mounting set Ø20	White Chrome Black	Z-U604 Z-U605 Z-U604-58

Model	H [mm]	C [mm]
AQUAPANEL, AQUAPANEL - E, AQUAPANEL - ER	790, 970 1240, 1510, 1780	215 305

## Mounting set AQUAPANEL (short)



- designed for use with all models of KORATHERM AQUAPANEL towel rail radiators
- design radiator fixed to the wall at four points
- the set of wall brackets is delivered according to the model of radiator, in three colours - white, black or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
  - 4 x brackets
  - all components for fitting to the wall
  - air vent
  - blanking plug




### Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
AQUAPANEL, AQUAPANEL - E, AQUAPANEL - ER	K10A	20	Mounting set Ø20	White Chrome Black	Z-U606 Z-U607 Z-U606-58

# MOUNTING OF **RADIK** STEEL PANEL RADIATORS

## DATA FOR MOUNTING

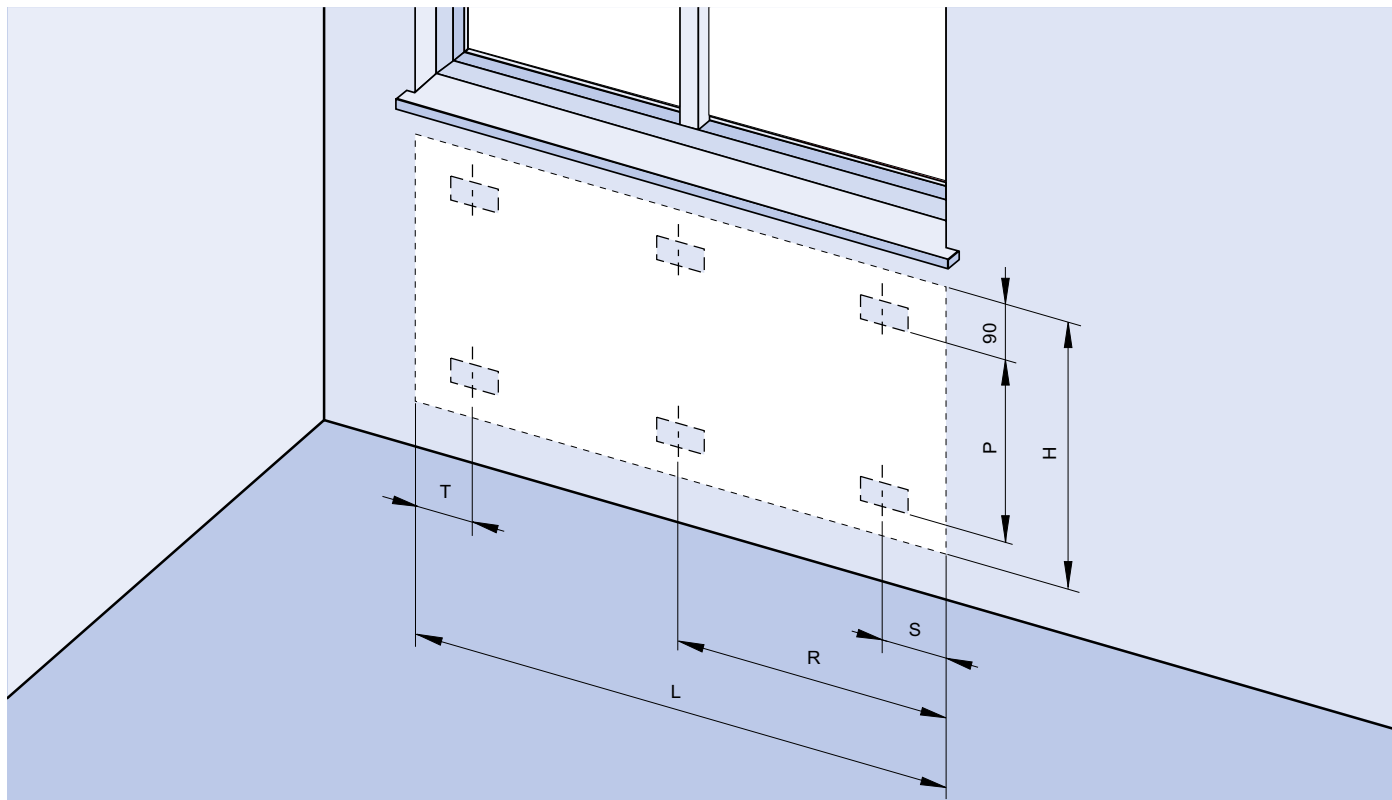

	Type	Radiator length L [mm]						
		400	500 ÷ 1600	1800	2000	2300	2600	3000
<b>S</b> [mm]	10, 20, 20S, 20 VK, 20 VKL, 20S VK, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	133	133	133	133	133	133	133
	10 VK, 10 VKM8	167	167	167	167	167	167	167
	10 VKL, 10 VKM8-L	100	133	133	133	133	133	133
	11, 11 VK, 11 VKL	117	150	150	150	150	150	150
<b>T</b> [mm]	10, 20, 20S, 20 VK, 20 VKL, 20S VK, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	133	133	133	133	133	133	133
	10 VK, 10 VKM8	100	133	133	133	133	133	133
	10 VKL, 10 VKM8-L	167	167	167	167	167	167	167
	11, 11 VK, 11 VKL	117	150	150	150	150	150	150
<b>R</b> [mm]	10, 20, 20S, 20 VK, 20 VKL, 20S VK, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	-	-	900	1000	1133	1300	1500
	10 VK, 10 VKL, 10 VKM8, 10 VKM8-L	-	-	900	1000	1133	1300	1500
	11, 11 VK, 11 VKL	-	-	883	983	1150	1283	1483

### Notice:

PLAN/LINE KLASIK = HYGIENE = CLEAN = KLASIK - R = PLAN/LINE KLASIK - R = KLASIK

PLAN/LINE VK = PLAN/LINE VKL = PLAN/LINE VKM8 = HYGIENE VK = CLEAN VK = VKM8 = VKM8-L = VK

PLAN 11 VKL = 11 VKL



H [mm]	300	400	500	554	600	700	900
P [mm]	145	245	345	399	445	545	745








# MOUNTING OF **RADIK** STEEL PANEL RADIATORS




## MOUNTING TEMPLATE



Construction element		Packing unit
Position	Name	Content
1	 Sheet metal 100 (intended for all models except for type 33 VKU)	- 10 pcs Sheet metal 100 mm - 20 pcs Dowel plug 12/60 mm - 20 pcs Washer 8,4 mm - 20 pcs Screw 8 x 60 mm - 1 pcs Ruler - Directions for use
2	 Sheet metal 155 (intended for all models)	- 10 pcs Sheet metal 155 mm - 20 pcs Dowel plug 12/60 mm - 20 pcs Screw 8 x 60 mm - 1 pcs Ruler - Directions for use
3	 Joining component G 1/2 internal	- 10 pcs Joining component G 1/2 internal - 10 pcs Bolt M6 with a wing nut - 10 pcs Washer 6,4 mm - Directions for use
4	 Joining component G 3/4 external	- 10 pcs Joining component G 3/4 external - 10 pcs Bolt M6 with a wing nut - 10 pcs Washer 6,4 mm - Directions for use
5	 Ruler for the mounting template	- A part of the packing unit - see position 1, 2 (can be ordered as a spare part)

- universal use for all models and types in VENTIL KOMPAKT, PLAN/LINE VENTIL KOMPAKT, RADIK PLAN/LINE VERTIKAL - M.
- prevents damage of the surface and theft of radiators during construction
- multiple use of the mounting template
- assembly of the complete heating mains in buildings under construction without the radiators
- enables a pressure test on the heating system in buildings under construction
- fixes the connection pipes during construction work (e.g. concreting the floor)
- connecting pitch of the connection pipes remains the same even during finishing work
- using the ruler and mounting instructions, you make preparation of conditions for installation of any wall brackets easier without the presence of the radiators (measuring, drilling holes or fitting dowel plugs into the wall)
- zinc-coated metal parts

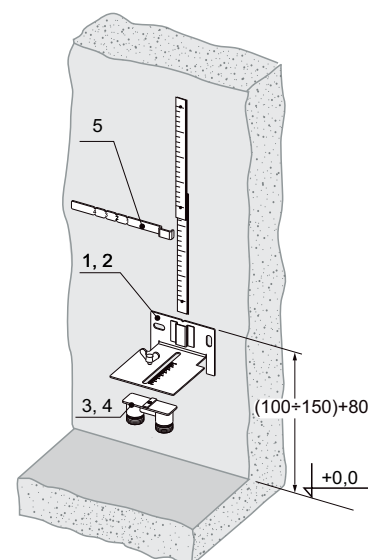

Type	Order number
Sheet metal 100	Z-MS001
Sheet metal 155	Z-MS002
Joining component G 1/2 internal	Z-MS003
Joining component G 3/4 external	Z-MS004
Ruler for the assembly template	Z-ND-010

# SUMMARY OF FIXING TECHNOLOGY **RADIK**

			Model and type															
Type of bracket	Height H [mm]	Order number	KLASIK / PLAN (LINE) KLASIK KLASIK - Z						VK / PLAN (LINE) VK / VK - Z VKL / PLAN (LINE) VKL						KLASIK-R			
			10	11	20	21	22	33	10	11	20	21	22	33	20	21	22	33
Simple wall bracket	300 ÷ 900	Z-U320		●	●	●	●	●		●	●	●	●	●	●	●	●	●
Simple wall bracket - angled	300 ÷ 900	Z-U300	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Double wall bracket	300	Z-U562	●	●	●	●	●	●		●	●	●	●	●				
	400	Z-U563	●	●	●	●	●	●		●	●	●	●	●				
	500	Z-U564	●	●	●	●	●	●		●	●	●	●	●				
	600	Z-U565	●	●	●	●	●	●		●	●	●	●	●				
	700	Z-U567	●	●	●	●	●	●		●	●	●	●	●				
	900	Z-U566	●	●	●	●	●	●		●	●	●	●	●				
Double wall bracket MB	300	Z-U521	●	●	●	●	●	●		●	●	●	●	●				
	400	Z-U522	●	●	●	●	●	●		●	●	●	●	●				
	500	Z-U523	●	●	●	●	●	●		●	●	●	●	●				
	600	Z-U524	●	●	●	●	●	●		●	●	●	●	●				
	700	Z-U525	●	●	●	●	●	●		●	●	●	●	●				
	900	Z-U526	●	●	●	●	●	●		●	●	●	●	●				
Compact bracket	300	Z-U571	●	●	●	●	●	●		●	●	●	●	●				
	400	Z-U572	●	●	●	●	●	●		●	●	●	●	●				
	500	Z-U573	●	●	●	●	●	●		●	●	●	●	●				
	600	Z-U574	●	●	●	●	●	●		●	●	●	●	●				
	700	Z-U577	●	●	●	●	●	●		●	●	●	●	●				
	900	Z-U575	●	●	●	●	●	●		●	●	●	●	●				
Compact bracket Plus	300	Z-U631			●	●	●	●			●	●	●	●				
	400	Z-U632			●	●	●	●			●	●	●	●				
	500	Z-U633			●	●	●	●			●	●	●	●				
	600	Z-U634			●	●	●	●			●	●	●	●				
	700	Z-U635			●	●	●	●			●	●	●	●				
	900	Z-U636			●	●	●	●			●	●	●	●				
Compact bracket P2	300	Z-U531			●	●	●	●			●	●	●	●				
	400	Z-U532			●	●	●	●			●	●	●	●				
	500	Z-U533			●	●	●	●			●	●	●	●				
	600	Z-U534			●	●	●	●			●	●	●	●				
	700	Z-U535			●	●	●	●			●	●	●	●				
	900	Z-U536			●	●	●	●			●	●	●	●				
Split Bracket Plus	200 ÷ 900	Z-U556 Z-U557			●	●	●	●			●	●	●	●				
Split bracket VERTIKAL	500 ÷ 2000	Z-U558	●	●	●	●	●	●	●	●	●	●	●	●				
External stand bracket - set	300 ÷ 900	Z-U210	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
External stand bracket - load-bearing profile	300	Z-U220	●	●	●	●	●	●	●	●	●	●	●	●				
	400	Z-U230	●	●	●	●	●	●	●	●	●	●	●	●				
	500	Z-U240	●	●	●	●	●	●	●	●	●	●	●	●				
	600 (554*)	Z-U250	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	700	Z-U255	●	●	●	●	●	●	●	●	●	●	●	●				
	900	Z-U260	●	●	●	●	●	●	●	●	●	●	●	●				
Stand brackets RADIK for types 22 and 33	200 ÷ 600	Z-U403					● <sup>1)</sup>	● <sup>1)</sup>					● <sup>1)</sup>	● <sup>1)</sup>			● <sup>1)</sup>	● <sup>1)</sup>
Internal stand bracket – universal	300 ÷ 900	Z-U331		●	●	●	●	●		●	●	●	●	●	●	●	●	●
Stand Bracket for types 22 and 33	200 ÷ 900	Z-U400					●	●					●	●			●	●
Drill-in bracket 15/120	200 ÷ 900	Z-U392					●	●					●	●			●	●
Drill-in bracket 15/100/70	200 ÷ 900	Z-U390			●	●					●	●			●	●		
Drill-in bracket 18/120	200 ÷ 900	Z-U391		●	●						●	●			●	●		
Drill-in bracket 18/110/100	300 ÷ 900	Z-U140		●	●	●	●	●		●	●	●	●	●	●	●	●	●
Drill-in bracket 15/100/70	300 ÷ 900	Z-U141	●						●									
Drill-in bracket 18/120	300 ÷ 900	Z-U144	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Drill-in bracket 18/110/100	300 ÷ 900	Z-U290	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Radiator with welded fixing hangers			Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

**Caption:**



Can be used  
Cannot be used



yes  
no

\* valid for RADIK KLASIK - R

<sup>1)</sup> cannot be used for PLAN and LINE models

VKM8 / VKM8-L						VKU / VKM8-U				PLAN (LINE) VKM8					PLAN (LINE) VERTIKAL - M		RADIK H = 200mm		HYGIENE HYGIENE VK			CLEAN CLEAN VK				
10	11	20	21	22	33	20	21	22	33	11	20	21	22	33	10	20	22	33	10	20S	30	10	20S	30	p.	
	●	●	●	●	●					●	●	●	●	●											4	
●	●	●	●	●	●					●	●	●	●	●											4	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											5	
	●	●	●	●	●					●	●	●	●	●											6	
	●	●	●	●	●					●	●	●	●	●											6	
	●	●	●	●	●					●	●	●	●	●											6	
	●	●	●	●	●					●	●	●	●	●											6	
	●	●	●	●	●					●	●	●	●	●											6	
		●	●	●	●	●	●	●	●		●	●	●	●											7	
		●	●	●	●	●	●	●	●		●	●	●	●											7	
		●	●	●	●	●	●	●	●		●	●	●	●											7	
		●	●	●	●	●	●	●	●		●	●	●	●											7	
		●	●	●	●	●	●	●	●		●	●	●	●											8	
		●	●	●	●	●	●	●	●		●	●	●	●											8	
		●	●	●	●	●	●	●	●		●	●	●	●											8	
		●	●	●	●	●	●	●	●		●	●	●	●											8	
		●	●	●	●	●	●	●	●		●	●	●	●											8	
		●	●	●	●	●	●	●	●		●	●	●	●			●	●							6	
●	●	●	●	●	●					●	●	●	●	●	●	●									7	
	●	●	●	●	●					●	●	●	●	●						●	●	●	●	●	●	10
	●	●	●	●	●					●	●	●	●	●						●	●	●	●	●	●	10
	●	●	●	●	●					●	●	●	●	●						●	●	●	●	●	●	10
	●	●	●	●	●					●	●	●	●	●						●	●	●	●	●	●	10
	●	●	●	●	●					●	●	●	●	●						●	●	●	●	●	●	10
	●	●	●	●	●					●	●	●	●	●						●	●	●	●	●	●	10
				● 2)	● 2)			● 2)	● 2)								● 1)	● 1)		●	●		●	●	●	10
				● 2)	● 2)			● 2)	● 2)				● 2)	● 2)						●	●		●	●	●	9
				● 2)	● 2)			● 2)	● 2)				● 2)	● 2)				●		●	●		●	●	●	12
		● 2)	● 2)			● 2)	● 2)				● 2)	● 2)		● 2)			●	●		●	●		●	●	●	11
		● 2)	● 2)			● 2)	● 2)				● 2)	● 2)														12
	●		●	●	●					●	●	●	●	●												11
●										●	●	●	●	●												14
●	●	●	●	●	●					●	●	●	●	●					●	●	●	●	●	●	●	15
●	●	●	●	●	●					●	●	●	●	●					●	●	●	●	●	●	●	15
Y	Y	Y	Y	Y	Y	N	N	N	N	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	

<sup>2)</sup> cannot be used for VKM8 models in lengths 400 and 500 mm.









KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT



KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMO

KORADO, a.s.  
Bří Hubálků 869  
560 02 Česká Třebová  
Czech Republic

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMONT

KORAMO

e-mail: [info@korado.cz](mailto:info@korado.cz)  
[www.korado.com](http://www.korado.com)

KORAMONT

KORAMONT

KORAMONT

KORAMONT

Ev. č.: 06/22.08.20 EN