

KORAMONT

Fixing and mounting of RADIK and KORALUX radiators





The KORAMONT 08/26 catalogue
replaces all previous issues.

The new plant KORADO, a.s. is with its technological equipment and organizational structure the most modern factory for the production of radiators in Europe.

Its modern and sophisticated set-up in the area of 30 000 m² enables further increases of production capacity whenever needed. The choice of all technology was driven by the maximum effort to ensure environment protection inside the factory as well as in its surroundings.

KORADO, a.s. is the holder of the ISO 9001 and ISO 14001 quality certificate.



info@korado.cz



www.korado.com



Bří Hubálků 869
560 02 Česká Třebová
Czech Republic

TABLE OF CONTENTS




FIXING OF RADIK STEEL PANEL RADIATORS - WALL BRACKETS.....	4
FIXING OF RADIK STEEL PANEL RADIATORS - STAND BRACKETS.....	9
FIXING OF RADIK STEEL PANEL RADIATORS - DRILL-IN BRACKETS.....	14
FIXING OF KORALUX TOWEL RAIL RADIATORS - WALL BRACKETS.....	16
FIXING OF KORALUX B, KORALUX B-ER TOWEL RAIL RADIATORS.....	19
FIXING OF DESIGN RADIATORS KORATHERM AQUAPANEL.....	20
MOUNTING OF RADIK STEEL PANEL RADIATORS - DATA FOR FIXING.....	21
MOUNTING OF RADIK VKM8 STEEL PANEL RADIATORS - DATA FOR FIXING.....	22
SUMMARY OF FIXING TECHNOLOGY FOR RADIK RADIATORS.....	24


FIXING OF **RADIK** STEEL PANEL RADIATORS

WALL BRACKETS

Simple wall bracket

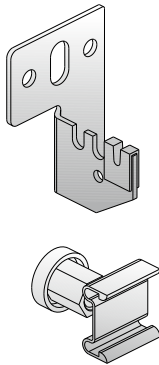


- designed for all models and types with welded fixing hangers except for type 10 of all RADIK models
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 40 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **500 N**

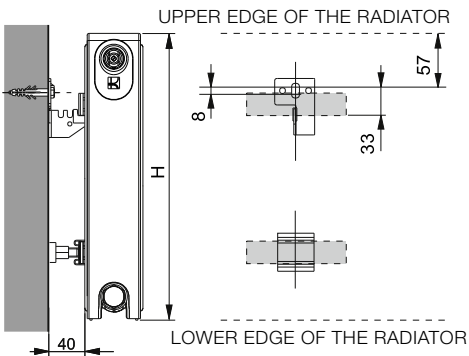


Set contains: 2 × bracket, 2 × support, screws 8 × 60 mm, dowel plugs Ø 10 mm

Type	H [mm]	Order number
Simple wall bracket	300 – 900	Z-U320

Simple wall bracket - angled

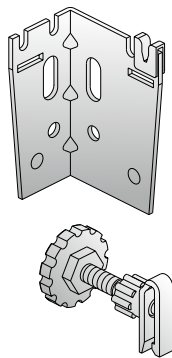

- designed for all models and types with welded fixing hangers
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 54 and 36 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **700 N**

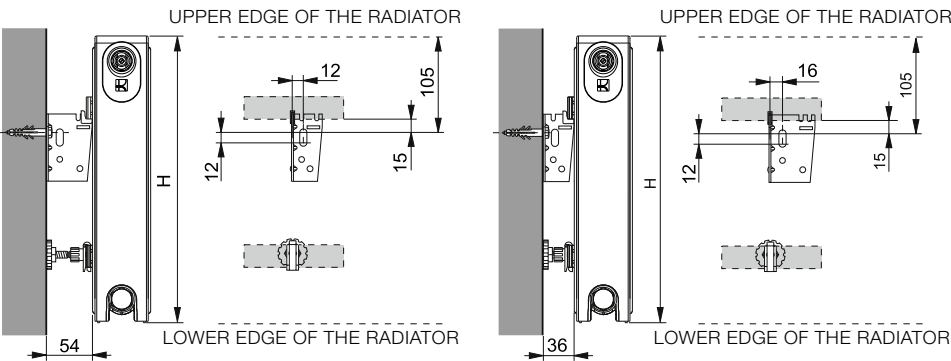

Set contains: 1 × right and left bracket, 2 × support, screws 8 × 60 mm, dowel plugs Ø 10 mm


Type	H [mm]	Order number
Simple wall bracket - angled	300 – 900	Z-U300

FIXING OF **RADIK** STEEL PANEL RADIATORS




WALL BRACKETS

Double wall bracket



- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- selection dependent on the height of the radiator **H**
- metal parts painted in white
- enables mounting on the wall at the distance of **D = 43 and 23 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **700 N**

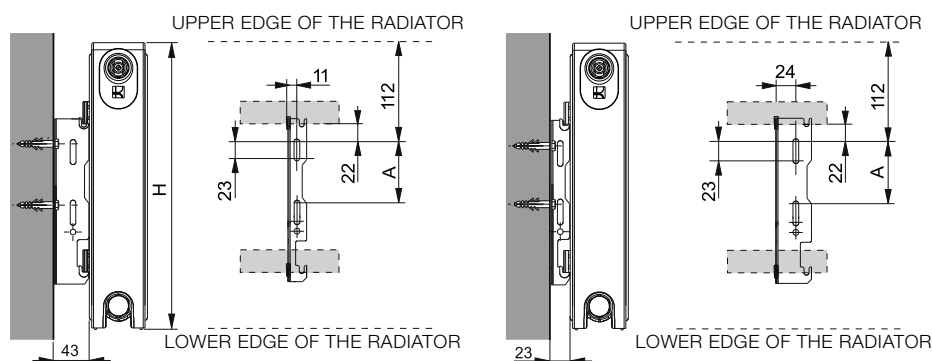


Set contains: 1 × right and left bracket, screws 6 × 50 mm, dowel plugs Ø 8 mm

Type	H [mm]	A [mm]	Order number
Double wall bracket	300	-	Z-U562
	400	141	Z-U563
	500	241	Z-U564
	600	341	Z-U565
	700	441	Z-U567
	900	641	Z-U566

Double wall bracket MB



- designed for all models and types with welded brackets, except type 10 and 11 (lengths of 2,000 mm and more) and all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT versions.
- equipped with a safety lock against lifting of the radiator
- selection dependent on the height of the radiator **H**
- metal parts zinc-coated
- enables mounting on the wall at the distance **D = 44 and 23 mm** from the wall
- used to concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **750 N**
- meets the class 3 according to the VDI 6036 safety standard

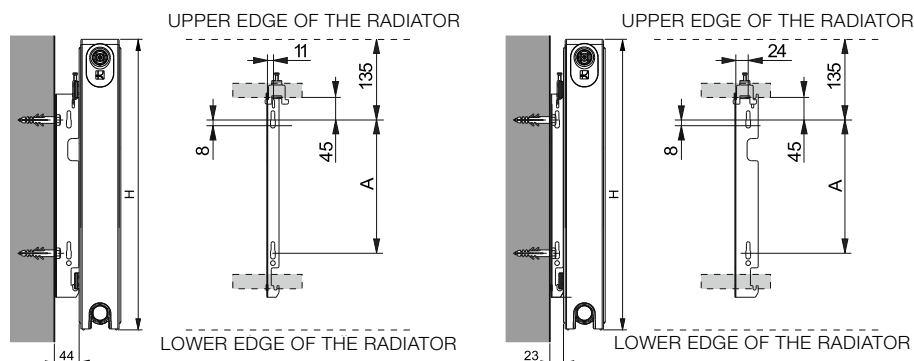

Set contains: 2 × brackets, screws 8 × 60 mm, dowels Ø 10 mm


Note: The maximum horizontal load in cross direction (perpendicular to the wall) **300 N**

Type	H [mm]	A [mm]	Order number
Double wall bracket MB	300	-	Z-U521
	400	136	Z-U522
	500	236	Z-U523
	600	336	Z-U524
	700	436	Z-U525
	900	636	Z-U526


FIXING OF **RADIK** STEEL PANEL RADIATORS

WALL BRACKETS

Compact bracket




- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 43 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **2700 N**
- meets the class 3 according to the VDI 6036 safety standard

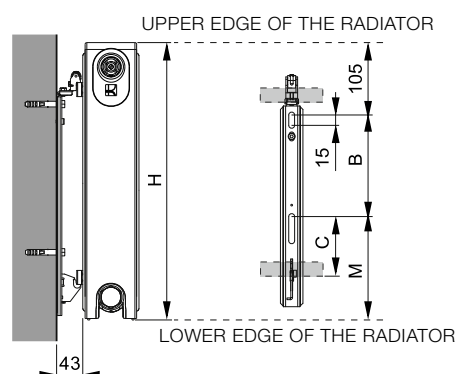


Set contains: 2 × bracket, screws 8 × 60 mm, dowel plugs Ø 10 mm

Type	H [mm]	B [mm]	C [mm]	M [mm]	Order number
Compact bracket	300	-	131	195	Z-U571
	400	147	84	148	Z-U572
	500	247	84	148	Z-U573
	600	347	84	148	Z-U574
	700	447	84	148	Z-U577
	900	647	84	148	Z-U575

Split bracket Plus



- designed mainly for the models without welded fixing hangers
- can be used also for all other radiator models and types with welded hangers except for types 10 and 11 of all models
- for radiators 1800 mm long and longer it is necessary to use three brackets, the third one shall be located in the middle of the radiator length
- selection not dependent on the radiator height **H**
- zinc-coated metal parts, top grill holder painted in white
- secures the radiator against lifting
- enables mounting on the wall at a distance of **D = 37–47 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1000 N**

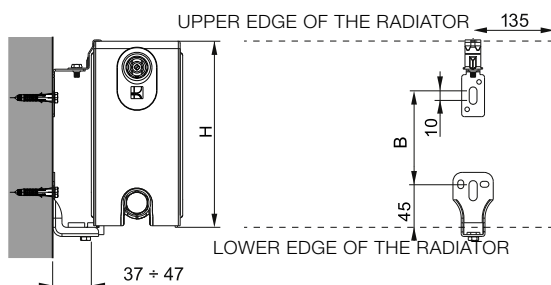

H [mm]	B [mm]
200	100
300	200
400	300
500	400
600	500
700	600
900	800

Set contains: 2 × bracket (Z-U556) or 3 × bracket (Z-U557), screws 8 × 60 mm, dowel plugs Ø 10 mm


Type	H [mm]	Set contains	Order number
Split Bracket Plus – set 2 pcs	200 – 900	2pcs	Z-U556
Split Bracket Plus – set 3 pcs	200 – 900	3pcs	Z-U557




FIXING OF **RADIK** STEEL PANEL RADIATORS

WALL BRACKETS

Compact bracket Plus



- designed mainly for radiators without welded fixing hangers
- can be also used for all other models and types with welded fixing hangers except for type 10 and 11 of all models
- for radiators 1800 mm long and longer, you must use three brackets, the third is positioned in the middle
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts, grill holder painted in white
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 30 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1500 N**
- meets the class 2 according to the VDI 6036 the safety standard

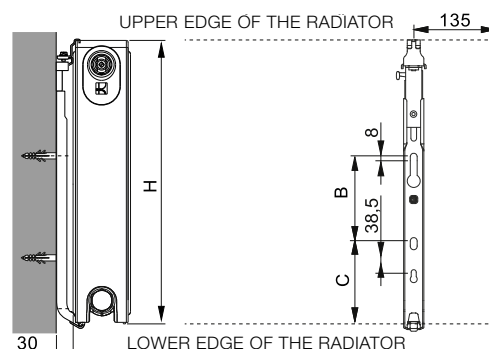


Set contains: 2 × bracket, screws 7 × 65 mm, dowel plugs Ø 10 mm


Note: Maximum permitted horizontal load on the bracket in transverse direction (perpendicularly to the wall) is **400 N**.

Type	H [mm]	B [mm]	C [mm]	Order number
Compact bracket Plus	300	74	105	Z-U631
	400	174	105	Z-U632
	500	274	105	Z-U633
	600	374	105	Z-U634
	700	474	105	Z-U635
	900	674	105	Z-U636

Split bracket VERTIKAL



- designed mainly for panel radiators RADIK and design radiators KORATHERM with welded fixing hangers and with minimum height **H = 500 mm**
- zinc-coated metal parts
- equipped with a safety catch to prevent the radiator from lifting and move
- enables mounting on the wall at a distance of **D = 40 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1500 N**
- meets the class 2 according to the VDI 6036 the safety standard

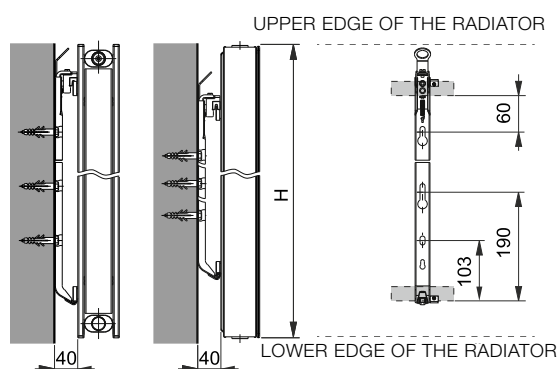

Set contains: 2 × brackets, screws 7 × 60 mm, dowel plugs Ø 10 mm, 4 × safety catch against lifting and move


Note: Maximum permitted horizontal load on the bracket in longitudinal and transverse direction is **600 N**.

Type	H [mm]	Order number
Split bracket VERTIKAL	minimum 500	Z-U558


FIXING OF RADIK STEEL PANEL RADIATORS

WALL BRACKETS

Compact bracket P2



- designed mainly for radiators without welded fixing hangers
- can be also used for all other models and types with welded fixing hangers except for type 10 and 11 of all models
- enables two ways of fixing the radiator (under or over the top grill)
- for radiators 1800 mm long and longer, you must use three brackets, the third is positioned in the middle
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts, grill holder painted in white
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 26 and 36 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1200 N**

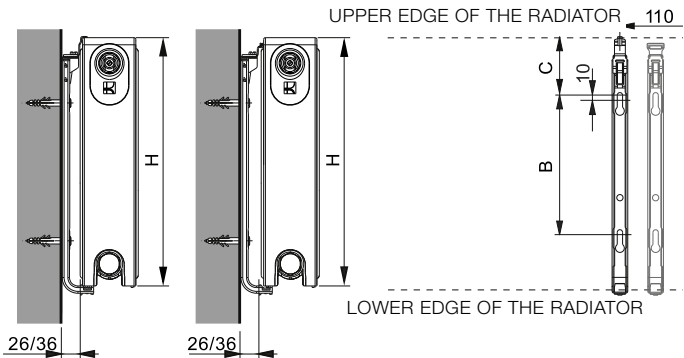


Set contains: 2 × bracket, screws 8 × 50 mm, dowel plugs Ø 10 mm


Note: When using the safety set P2-70 (Z-U538) it meets the class 3 according to the VDI 6036 safety standard.

Type	H [mm]	B [mm]	C [mm]	Order number
Compact bracket P2	300	119	94	Z-U531
	400	219	94	Z-U532
	500	319	94	Z-U533
	600	419	94	Z-U534
	700	519	94	Z-U535
	900	719	94	Z-U536

Safety set P2-70



- accessories to the Compact bracket P2
- prevents longitudinal move of the radiator
- mainly designed for radiators without welded fixing hangers

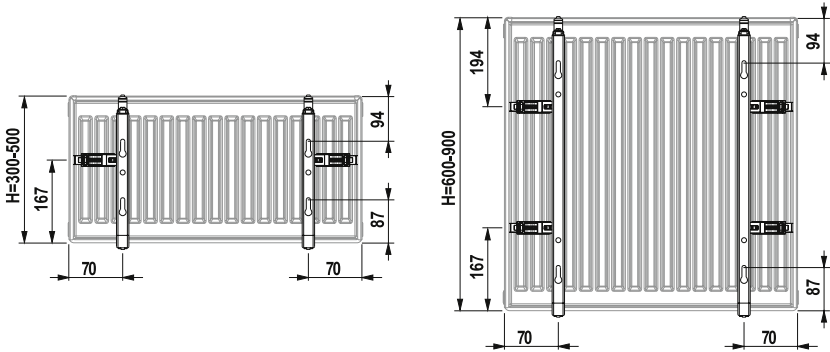

The set includes: 2 × brackets, screws 6 × 50 mm, dowels Ø 8 mm

Note: For units with a height of 600-900 mm, 4 brackets are recommended


Type	Order number
Safety set P2-70	Z-U538




FIXING OF **RADIK** STEEL PANEL RADIATORS

STAND BRACKETS

Internal stand bracket – universal



- designed for all models except for models RADIK VKM8 and COMBI VK
- suitable for all types except for type 10
- radiator panel and convector fins are used for fixing the radiator
- assembled by manufacturer
- selection not dependent on the height of the radiator **H**
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1800 N**
- meets class 3 according to the VDI 6036 safety standard ($T_{\max} = 150 \text{ mm}$)

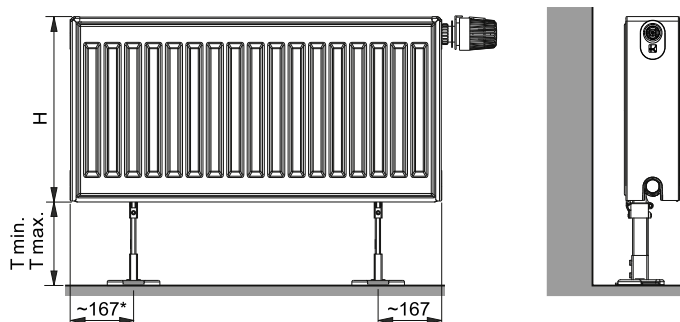

*100 mm is valid for
radiator
L = 400 mm

Set contains: 1 × bracket


RADIK – number of brackets Z-U331				
Height H = 300 – 600		Height H = 700 – 900		
Lenght L	Number of brackets	Lenght L	Number of brackets	
400 – 1800	2	400 – 1200	2	
2000 – 2300	3	1400 – 1800	3	
2600 – 3000	4	2000 – 2300	4	

Type	H [mm]	T min [mm]	T max [mm]	Order number
Internal stand bracket – universal	300	150	150	Z-U331
	400 – 900	100		


FIXING OF **RADIK** STEEL PANEL RADIATORS

STAND BRACKETS

External stand bracket



- designed for all models and types with welded fixing hangers except for type 10 of models VKM8
- welded fixing hangers are used for fixing the radiator
- ordering requires 2 separate items (set + load-bearing profile) and their assembly when fixing the radiator
- selection of the load-bearing profile is dependent on the height of the radiator **H**
- visible metal parts painted in white, other parts zinc-coated
- maximum permitted vertical load on the bracket is **1000 N**

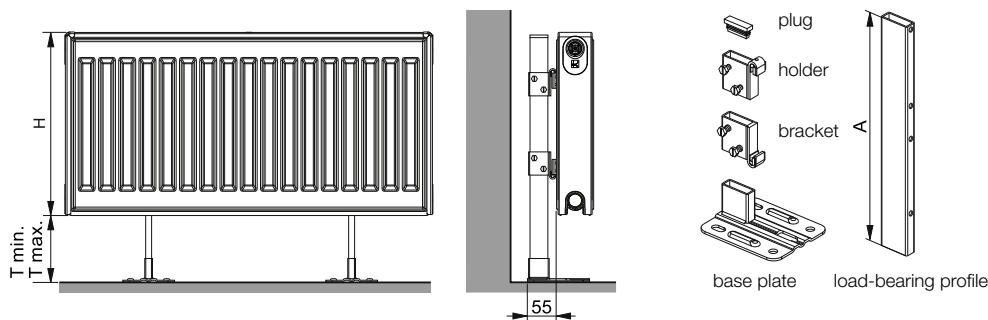


Set Z-U210 contains: 1 × base plate, bracket, holder and plug, for the completion of the bracket, **it is necessary to order a load-bearing profile according to the height of the radiator H.**


Note: modification of the length of the load-bearing profile can allow you to achieve different T_{min} and T_{max} values.

Type	H [mm]	A [mm]	T min [mm]	T max [mm]	Order number
External stand bracket	300 – 900	-	-	-	Z-U210
Load-bearing profile	300	460	170	235	Z-U220
Load-bearing profile	400	560	170	235	Z-U230
Load-bearing profile	500	660	170	235	Z-U240
Load-bearing profile	600	760	170	235	Z-U250
Load-bearing profile	700	860	170	235	Z-U255
Load-bearing profile	900	1060	170	235	Z-U260

Stand brackets RADIK for types 22 and 33

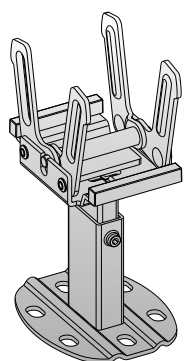

- designed for all models except for PLAN, LINE and COMBI VK versions
- in case of VKM8 models use only from the length of 600 mm
- designed for models 22, 33 and models 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of $H_{max} = 600$ mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **2000 N**
- meets class 3 according to the VDI 6036 safety standard

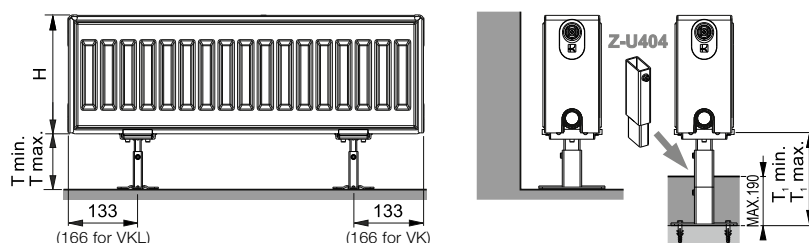

Set contains: 1x bracket, all components for fixing, directions for use


Number of brackets Z-U403					
Lenght L	400 – 1600	1800 – 2300	2600 – 3000		
Number of brackets	2	3	4		
Type	H [mm]	T min [mm]	T max [mm]	Order number	
Stand bracket RADIK for types 22 and 33	200 – 600	120	170	Z-U403	
Stand bracket RADIK for types 22 and 33 with extension	200 – 600	220	270	Z-U403, Z-U404	

FIXING OF **RADIK** STEEL PANEL RADIATORS




STAND BRACKETS

Stand bracket W RADIK type 20, 21 (low)




- designed for all models
- in case of VKM8 models use only from the length of 600 mm
- designed for types 20 and 21
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of $H_{max} = 900$ mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

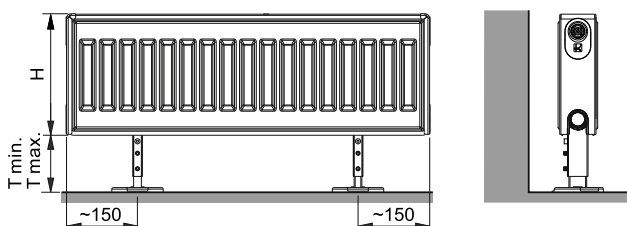


Set contains: 1x bracket, directions for use

Number of brackets Z-U391				
Lenght L	400 – 1600	1800 – 2300	2600 – 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket W RADIK type 20, 21	200 – 900	120	150	Z-U391

Stand bracket W RADIK type 22, 33 (low)



- designed for all models except for models COMBI VK
- in case of VKM8 models use only from the length of 600 mm
- designed for types 22, 33 and types 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of $H_{max} = 900$ mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

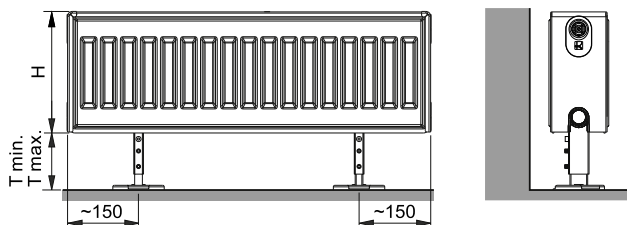


Set contains: 1x bracket, directions for use

Number of brackets Z-U392				
Lenght L	400 – 1600	1800 – 2300	2600 – 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket W RADIK type 22, 33 (low)	200 – 900	120	150	Z-U392


FIXING OF **RADIK** STEEL PANEL RADIATORS

STAND BRACKETS

Stand bracket for types 22, 33 (high)




- designed for all models except for models COMBI VK
- in case of VKM8 models use only from the length of 600 mm
- designed for types 22, 33 and types 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of $H_{max} = 900$ mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

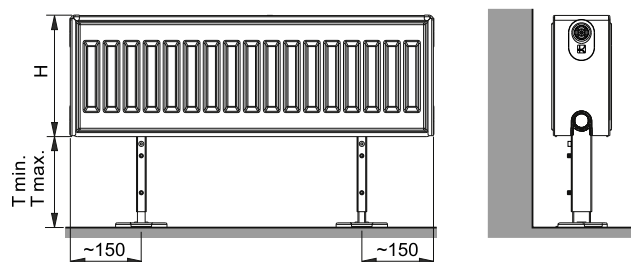


Set contains: 1x bracket, directions for use

Number of brackets Z-U400				
Lenght L	400 – 1600	1800 – 2300	2600 – 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stojánková konzola pro Typy 22, 33	200 – 900	165	320	Z-U400

Stand bracket for types 20, 21 (high)



- designed for all models
- in case of VKM8 models use only from the length of 600 mm
- designed for types 20 and 21
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of $H_{max} = 900$ mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1200 N**

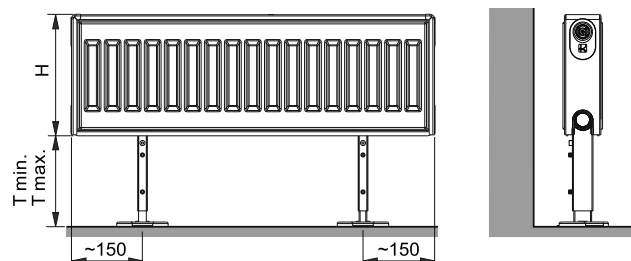


Set contains: 1x bracket, directions for use


Number of brackets Z-U390				
Lenght L	400 – 1600	1800 – 2300	2600 – 3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket for types 20, 21	200 – 900	165	320	Z-U390




Accessories for stand brackets

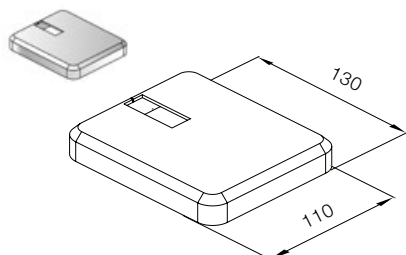


Z-U440
Cover for the base plate
for the external bracket
(Z-U210)




Z-U405
Cover for the base plate
for the stand bracket MB
(Z-U403)




Z-U404
Extension piece for stand
bracket MB (Z-U403)

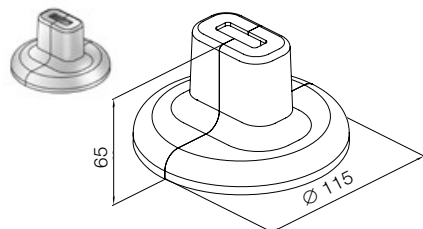

Z-U450
Cover for the base plate
for the internal bracket -
universal (Z-U331)



Z-U460
Cover for the load-bearing profile
(Z-U331, Z-U390, Z-U391,
Z-U392, Z-U400)




Z-U393
Cover for the base plate
for the stand bracket W
(Z-U390, Z-U391, Z-U392,
Z-U400)

Type	Packing	Order number
Cover for the base plate for the external bracket (Z-U210)	1 pc	Z-U440
Cover for the base plate for the internal bracket (Z-U331)	1 pc	Z-U450
Cover for the load-bearing profile (Z-U331, Z-U390, Z-U391, Z-U392, Z-U400)	1 pc	Z-U460
Cover for the base plate for the stand bracket W (Z-U390, Z-U391, Z-U392, Z-U400)	1 pc	Z-U393
Cover for the base plate for the stand bracket MB (Z-U403)	1 pc	Z-U405
Extension piece for stand bracket MB (Z-U403)	1 pc	Z-U404


FIXING OF **RADIK** STEEL PANEL RADIATORS

DRILL-IN BRACKETS

Drill-in bracket 15/120




- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN/LINE VENTIL KOMPAKT version
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 45 – 50 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- Ø 16 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **700 N**

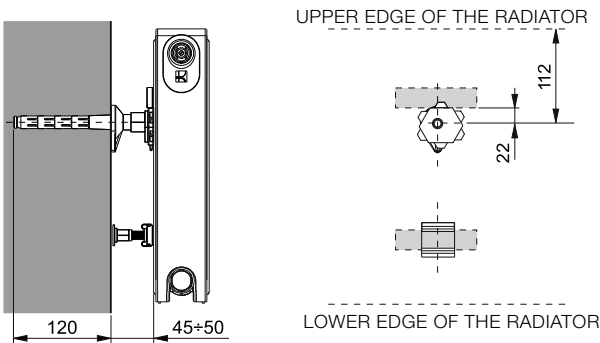


Set contains: 1 × bracket, 1 × support, 2 × spacer ring

Type	H [mm]	Order number
Drill-in bracket 15/120	300 – 900	Z-U140

Drill-in bracket 15/100/70



- designed mainly for type 10 of all models with welded fixing hangers
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 65 – 70 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- Ø 16 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **400 N**

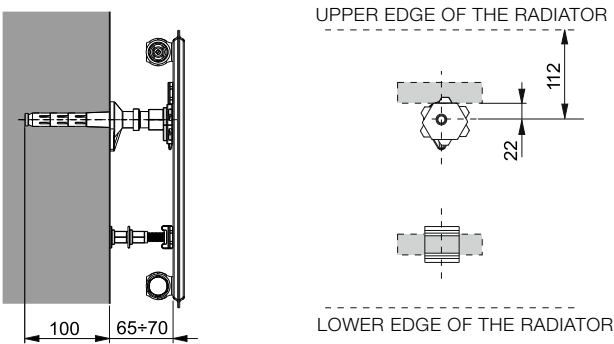

Set contains: 1 × bracket, 1 × support, 2 × spacer ring


Type	H [mm]	Order number
Drill-in bracket 15/100/70	300 – 900	Z-U141





FIXING OF **RADIK** STEEL PANEL RADIATORS

DRILL-IN BRACKETS

Drill-in bracket 18/120




- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 35 – 65 mm** from the wall, at a distance of **D = 65 – 80 mm** a bracket must also be used on the lower pair of fixing hangers (instead of a support)
- used for masonry from perforated and solid bricks and porous concrete
- Ø 18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **1000 N** at **D = 50 mm**





Set contains: 2 × bracket, 2 × support

Type	H [mm]	Order number
Drill-in bracket 18/120	300 – 900	Z-U144

Drill-in bracket 18/110/100



- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 70 – 100 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- Ø 18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **500 N** at **D = 100 mm**




Set contains: 2 × bracket

Type	H [mm]	Order number
Drill-in bracket 18/110/100	300 – 900	Z-U290



FIXING OF KORALUX RADIATORS

WALL BRACKETS - MAX, COMFORT, CLASSIC

Wall brackets KORALUX MAX, COMFORT, CLASSIC - General information



- universal set designed for fixing of both radiators with straight tubes (LINEAR design) and with curved tubes (RONDO design) thanks to a special component (see position 1)
- the set of wall brackets is delivered according to the model of radiator, in three colours - white, black or chrome
- set contains:
 - 4 × brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug
- towel rail radiator fixed to the wall at four points
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry




Wall brackets KORALUX MAX, COMFORT, CLASSIC - Fitting

- position the bracket between the second and third pipe from the top and the bottom (level A)
- carefully tighten the screw (position 2) so the compressed part of the bracket is not deformed (position 3) and the cover (position 4) fits perfectly into the compressed part of the bracket
- we recommend the distance of the bracket centre on the wall from the side edge of the radiator according to the dimension B

Wall brackets KORALUX MAX, COMFORT, CLASSIC - Range


- three versions of the mounting sets can be delivered
- the choice of the type of the bracket depends on distance between the tubes
 - **Mounting set Ø 24/35** - designed for use with all models of KORALUX MAX towel rail radiators
 - **Mounting set Ø 24/40** - designed for use with all models of KORALUX COMFORT towel rail radiators
 - **Mounting set Ø 20/40** - designed for use with all models of KORALUX CLASSIC towel rail radiators

KLMM, KLCM, KLTM
with bottom middle connection

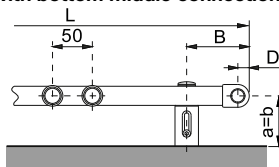

KLM, KLC, KLT
without bottom middle connection


KRMM, KRCM, KRTM
with bottom middle connection

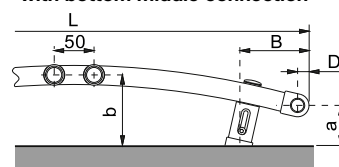

KRM, KRC, KRT
without bottom middle connection

KLME, KRME, KLTE, KRTE, KLCE, KRCE, KLMH, KRMH, KLTH, KRTH, KLCH, KRCH, KLMA, KRMA, KLTA, KRTA, KLCA, KRCA - direct electric radiators, not connected to the heating system

Mounting set Ø 24/35 - MAX



Model	Name	Tube diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450	600	750
LINEAR MAX	KLM	24	83	70	71 – 88	15	-	-	-
LINEAR MAX - M	KLMM	24	83	70	71 – 88	15	71 – 88	71 – 88	71 – 88
LINEAR MAX - E	KLME	24	83	70	71 – 88	15	71 – 88	71 – 88	71 – 88
LINEAR MAX - ERH	KLMH	24	83	70	71 – 88	15	71 – 88	71 – 88	71 – 88
LINEAR MAX - ERA	KLMA	24	83	70	71 – 88	15	71 – 88	71 – 88	71 – 88
RONDO MAX	KRM	24	83	85	65 – 81	15	94 – 110	100 – 116	104 – 120
RONDO MAX - M	KRMM	24	83	85	65 – 81	15	94 – 110	100 – 116	104 – 120
RONDO MAX - E	KRME	24	83	85	65 – 81	15	94 – 110	100 – 116	104 – 120
RONDO MAX - ERH	KRMH	24	83	85	65 – 81	15	94 – 110	100 – 116	104 – 120
RONDO MAX - ERA	KRMA	24	83	85	65 – 81	15	94 – 110	100 – 116	104 – 120

Information for ordering


Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
LINEAR MAX	KLM	24	Mounting set Ø 24/35	White	Z-U512
LINEAR MAX - M	KLMM	24			
LINEAR MAX - E	KLME	24			
LINEAR MAX - ERH	KLMH	24		Chrome	Z-U513
LINEAR MAX - ERA	KLMA	24			
RONDO MAX	KRM	24			
RONDO MAX - M	KRMM	24		Black	Z-U512-58
RONDO MAX - E	KRME	24			
RONDO MAX - ERH	KRMH	24			
RONDO MAX - ERA	KRMA	24			

FIXING OF KORALUX RADIATORS



WALL BRACKETS - MAX, COMFORT, CLASSIC, EXCLUSIVE

Mounting set Ø 24/40 - COMFORT




Model	Name	Tube diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450/500	600	750
LINEAR COMFORT	KLT	24	90	70	73 - 92	15	73 - 92	73 - 92	73 - 92
LINEAR COMFORT - M	KLTM	24	90	70	73 - 92	15	73 - 92	73 - 92	73 - 92
LINEAR COMFORT - E	KLTE	24	90	70	73 - 92	15	73 - 92	73 - 92	73 - 92
LINEAR COMFORT - ERH	KLTH	24	90	70	73 - 92	15	73 - 92	73 - 92	73 - 92
LINEAR COMFORT - ERA	KLTA	24	90	70	73 - 92	15	73 - 92	73 - 92	73 - 92
RONDO COMFORT	KRT	24	90	85	67 - 85	15	96 - 114	103 - 121	104 - 122
RONDO COMFORT - M	KRTM	24	90	85	67 - 85	15	96 - 114	103 - 121	104 - 122
RONDO COMFORT - E	KRTE	24	90	85	67 - 85	15	96 - 114	103 - 121	104 - 122
RONDO COMFORT - ERH	KRTH	24	90	85	67 - 85	15	96 - 114	103 - 121	104 - 122
RONDO COMFORT - ERA	KRTA	24	90	85	67 - 85	15	96 - 114	103 - 121	104 - 122

Information for ordering

Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
LINEAR COMFORT	KLT	24	Mounting set Ø 24/40	White	Z-U594
LINEAR COMFORT - M	KLTM	24			
LINEAR COMFORT - E	KLTE	24			
LINEAR COMFORT - ERH	KLTH	24			
LINEAR COMFORT - ERA	KLTA	24		Chrome	Z-U595
RONDO COMFORT	KRT	24			
RONDO COMFORT - M	KRTM	24			
RONDO COMFORT - E	KRTE	24		Black	Z-U594-58
RONDO COMFORT - ERH	KRTH	24			
RONDO COMFORT - ERA	KRTA	24			

Mounting set Ø 20/40 - CLASSIC




Model	Name	Tube diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]			
							450	500	600	750
LINEAR CLASSIC	KLC	20	90	70	71 - 90	15	71 - 90	71 - 90	71 - 90	71 - 90
LINEAR CLASSIC - M	KLCM	20	90	70	71 - 90	15	71 - 90	71 - 90	71 - 90	71 - 90
LINEAR CLASSIC - E	KLCE	20	90	70	71 - 90	15	71 - 90	71 - 90	71 - 90	71 - 90
LINEAR CLASSIC - ERH	KLCH	20	90	70	71 - 90	15	71 - 90	71 - 90	71 - 90	71 - 90
LINEAR CLASSIC - ERA	KLCA	20	90	70	71 - 90	15	71 - 90	71 - 90	71 - 90	71 - 90
RONDO CLASSIC	KRC	20	90	85	64 - 82	15	93 - 111	94 - 112	100 - 118	104 - 122
RONDO CLASSIC - M	KRCM	20	90	85	64 - 82	15	93 - 111	94 - 112	100 - 118	104 - 122
RONDO CLASSIC - E	KRCE	20	90	85	64 - 82	15	93 - 111	94 - 112	100 - 118	104 - 122
RONDO CLASSIC - ERH	KRCH	20	90	85	64 - 82	15	93 - 111	94 - 112	100 - 118	104 - 122
RONDO CLASSIC - ERA	KRCA	20	90	85	64 - 82	15	93 - 111	94 - 112	100 - 118	104 - 122

Information for ordering

Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
LINEAR CLASSIC	KLC	20	Mounting set Ø 20/40	White	Z-U592
LINEAR CLASSIC - M	KLCM	20			
LINEAR CLASSIC - E	KLCE	20			
LINEAR CLASSIC - ERH	KLCH	20			
LINEAR CLASSIC - ERA	KLCA	20		Chrome	Z-U593
RONDO CLASSIC	KRC	20			
RONDO CLASSIC - M	KRCM	20			
RONDO CLASSIC - E	KRCE	20		Black	Z-U592-58
RONDO CLASSIC - ERH	KRCH	20			
RONDO CLASSIC - ERA	KRCA	20			

Mounting set Ø 22/40 - EXCLUSIVE



Model	Name	Tube diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450	600	750
LINEAR EXCLUSIVE - M	KLXM	22	90	70	75 - 90	22	75 - 90	75 - 90	75 - 90
RONDO EXCLUSIVE - M	KRXM	22	90	90	60 - 75	22	80 - 95	90 - 105	110 - 125


Information for ordering

Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
LINEAR EXCLUSIVE - M	KLXM	22	Mounting set Ø 22/40	Chrome	Z-U598
RONDO EXCLUSIVE - M	KRXM	22			Z-U599


FIXING OF KORALUX RADIATORS

WALL BRACKETS - STANDARD

Mounting set Ø20 universal - STANDARD



- designed for use with all models of KORALUX STANDARD towel rail radiators
- towel rail radiator fixed to the wall at four mounting points
- the set of wall brackets is delivered according to the model of radiator, in two colours - white or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
 - 4 × brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug

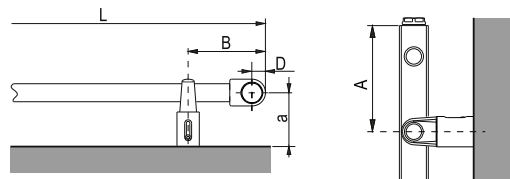


Model	Name	Tube diameter [mm]	A [mm]	B [mm]	a [mm]	D [mm]
STANDARD	KS	20	110	70	72 – 81	15


Information for ordering

Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
STANDARD	KS	20	Mounting set Ø20	White Chrome	Z-U588 Z-U589

Room divider set KORALUX

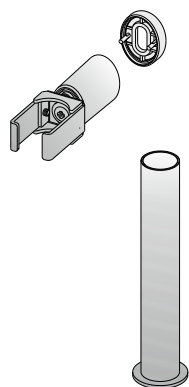

- designed for all KORALUX radiators (except KORALUX NEO)
- towel rail radiator is in position perpendicularly to the wall
- towel rail radiator fixed to the wall at two points and to the floor at one point
- the set is delivered according to the model of radiator in two colours in two colours – white or chrome
- set contains:
 - 2 × wall brackets
 - 1 × stand bracket
 - all components for fitting

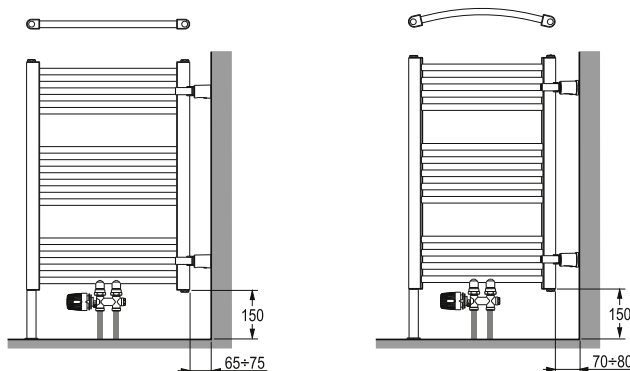


Model	Type of set	Colour	Order number
LINEAR CLASSIC, LINEAR CLASSIC - M, LINEAR CLASSIC - E, LINEAR CLASSIC - ERH, LINEAR CLASSIC - ERA	Room divider set KORALUX 40×30	white chrome	Z-U168
RONDO CLASSIC, RONDO CLASSIC - M, RONDO CLASSIC - E, RONDO CLASSIC - ERH, RONDO CLASSIC - ERA			Z-U169
STANDARD	Room divider set KORALUX 41×35	white chrome	Z-U170
LINEAR EXCLUSIVE - M, RONDO EXCLUSIVE - M			Z-U171
LINEAR COMFORT, LINEAR COMFORT - M, LINEAR COMFORT - E, LINEAR COMFORT - ERH, LINEAR COMFORT - ERA	Room divider set KORALUX 41×35	white chrome	Z-U170
RONDO COMFORT, RONDO COMFORT - M, RONDO COMFORT - E, RONDO COMFORT - ERH, RONDO COMFORT - ERA			Z-U171
LINEAR MAX, LINEAR MAX - M, LINEAR MAX - E, LINEAR MAX - ERH, LINEAR MAX - ERA	Room divider set KORALUX 41×35	white chrome	Z-U170
RONDO MAX, RONDO MAX - M, RONDO MAX - E, RONDO MAX - ERH, LINEAR MAX - ERA			Z-U171

FIXING OF KORALUX B, KORALUX B-ER RADIATORS





WALL BRACKETS - MAX (LONG), COMFORT (LONG)

Mounting set Ø 24/35 MAX (long)




- suitable for KORALUX LINEAR MAX B / B-ER towel rail radiators with electric booster
- towel rail radiator fixed to the wall at four mounting points
- the set of wall brackets is delivered in three colours - white, black or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
 - 4 × brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug

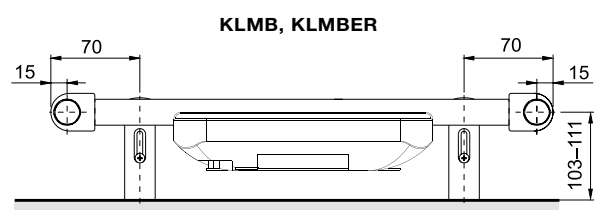



Information for ordering

Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
KORALUX LINEAR MAX B	KLMB	24	Mounting set Ø24/35	White	Z-U646
KORALUX LINEAR MAX B - ER	KLMBER			Chrome	Z-U647
				Black	Z-U652
Model	H [mm]				C [mm]
KORALUX LINEAR MAX B	1 215,1 495,1 810				83
KORALUX LINEAR MAX B - ER					

Mounting set Ø 24/40 COMFORT (long)



- suitable for KORALUX LINEAR COMFORT B / B-ER towel rail radiators with electric booster
- towel rail radiator fixed to the wall at four mounting points
- the set of wall brackets is delivered in three colours - white, black or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
 - 4 × brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug

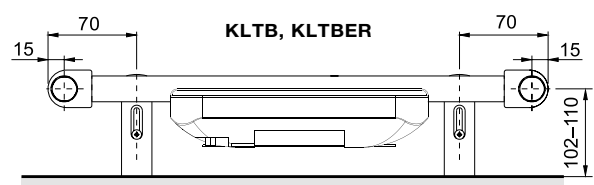


Information for ordering

Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
KORALUX LINEAR COMFORT B	KLTB	24	Mounting set Ø 24/40	White	Z-U648
KORALUX LINEAR COMFORT MAX B - ER	KLTER			Chrome	Z-U649
				Black	Z-U653
Model	H [mm]				C [mm]
KORALUX LINEAR COMFORT B	1 220, 1 500, 1 820				90
KORALUX LINEAR COMFORT MAX B - ER					


FIXING OF DESIGN RADIATORS

KORATHERM AQUAPANEL


Mounting set AQUAPANEL (long)




- designed for use with all models of KORATHERM AQUAPANEL, AQUAPANEL B/B-ER towel rail radiators
- design radiator fixed to the wall at four points
- the set of wall brackets is delivered according to the model of radiator, in three colours - white, black or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
 - 4 × brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug

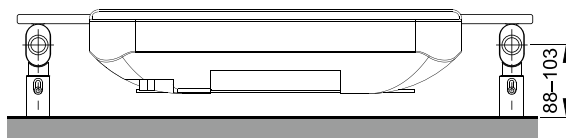

K10AB, K10ABER

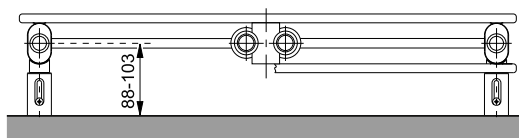

K20A



Type 10


Type 20

Information for ordering


Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
AQUAPANEL, AQUAPANEL - E, AQUAPANEL - ERH, AQUAPANEL - ERA	K20A	20	Mounting set Ø 20	White Chrome Black	Z-U604
AQUAPANEL B, AQUAPANEL B-ER	K10AB K10ABER				Z-U605 Z-U604-58

Model	H [mm]	C [mm]
AQUAPANEL, AQUAPANEL - E, AQUAPANEL - ERH, AQUAPANEL - ERA	790, 970	215
AQUAPANEL B, AQUAPANEL B-ER	1240, 1510, 1780	305


Mounting set AQUAPANEL (short)




- designed for use with all models of KORATHERM AQUAPANEL towel rail radiators
- design radiator fixed to the wall at four points
- the set of wall brackets is delivered according to the model of radiator, in three colours - white, black or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
 - 4 × brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug



K10A



Type 10



Type 20

Information for ordering


Model	Name	Tube diameter [mm]	Type of set	Colour	Order number
AQUAPANEL, AQUAPANEL - E, AQUAPANEL - ERH, AQUAPANEL - ERA	K10A	20	Mounting set Ø 20	White Chrome Black	Z-U606 Z-U607 Z-U606-58

Mounting of other designer radiators is described in detail in the [KORATHERM catalogue on pages 40–44](#)

MOUNTING OF **RADIK** STEEL PANEL RADIATORS



DATA FOR MOUNTING

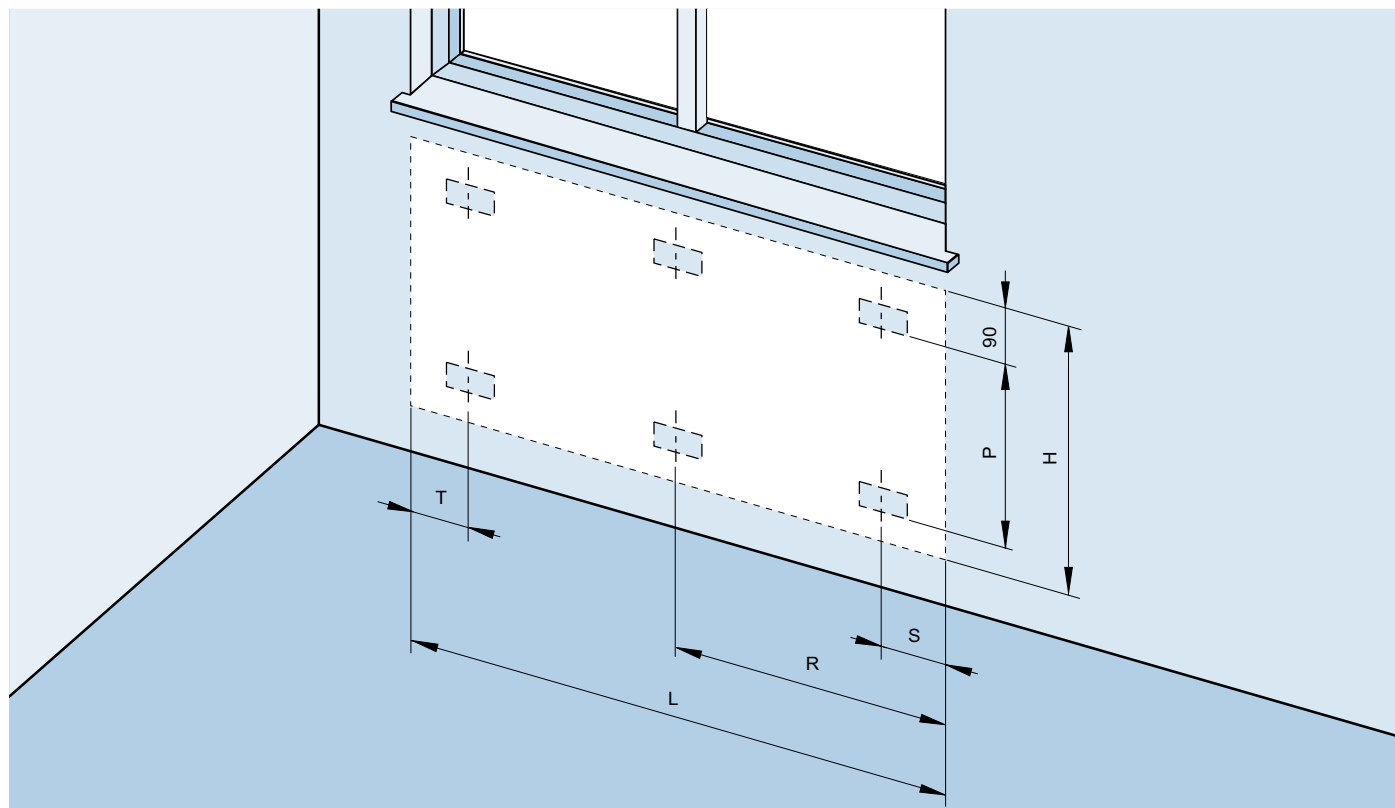

	Type	L [mm]						
		400	500-1600	1800	2000	2300	2600	3000
S [mm]	10 (KLASIK) 20, 20S, 20 VK, 20S VK, 20 VKL, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	133	133	133	133	133	133	133
	10 VK	167	167	167	167	167	167	167
	10 VKL	100	133	133	133	133	133	133
	11, 11 VK, 11 VKL	117	150	150	150	150	150	150
	21 VKU, 22 VKU, 33 VKU	135	135	135	135	135	135	135
T [mm]	10 20, 20S, 20 VK, 20S VK, 20 VKL, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	133	133	133	133	133	133	133
	10 VK	100	133	133	133	133	133	133
	10 VKL	167	167	167	167	167	167	167
	11, 11 VK, 11 VKL,	117	150	150	150	150	150	150
	21 VKU, 22 VKU, 33 VKU	135	135	135	135	135	135	135
R [mm]	10 20, 20S, 20 VK, 20S VK, 20 VKL, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	-	-	900	1000	1133	1300	1500
	10 VK, 10 VKL	-	-	900	1000	1133	1300	1500
	11, 11 VK, 11 VKL	-	-	900	1000	1133	1300	1500
	21 VKU, 22 VKU, 33 VKU	-	-	905	1005	1135	1305	1505

Notice:

PLAN/LINE KLASIK = HYGIENE = CLEAN = KLASIK - R = PLAN/LINE KLASIK - R = KLASIK


PLAN/LINE VK = PLAN/LINE VKL = PLAN/LINE VKM8 = HYGIENE VK = CLEAN VK = VKM8 = VKM8-L = VK

PLAN 11 VKL = 11 VKL

H [mm]	300	400	500	554	600	700	900
P [mm]	145	245	345	399	445	545	745

MOUNTING OF **RADIK VKM8** STEEL PANEL RADIATORS

DATA FOR MOUNTING


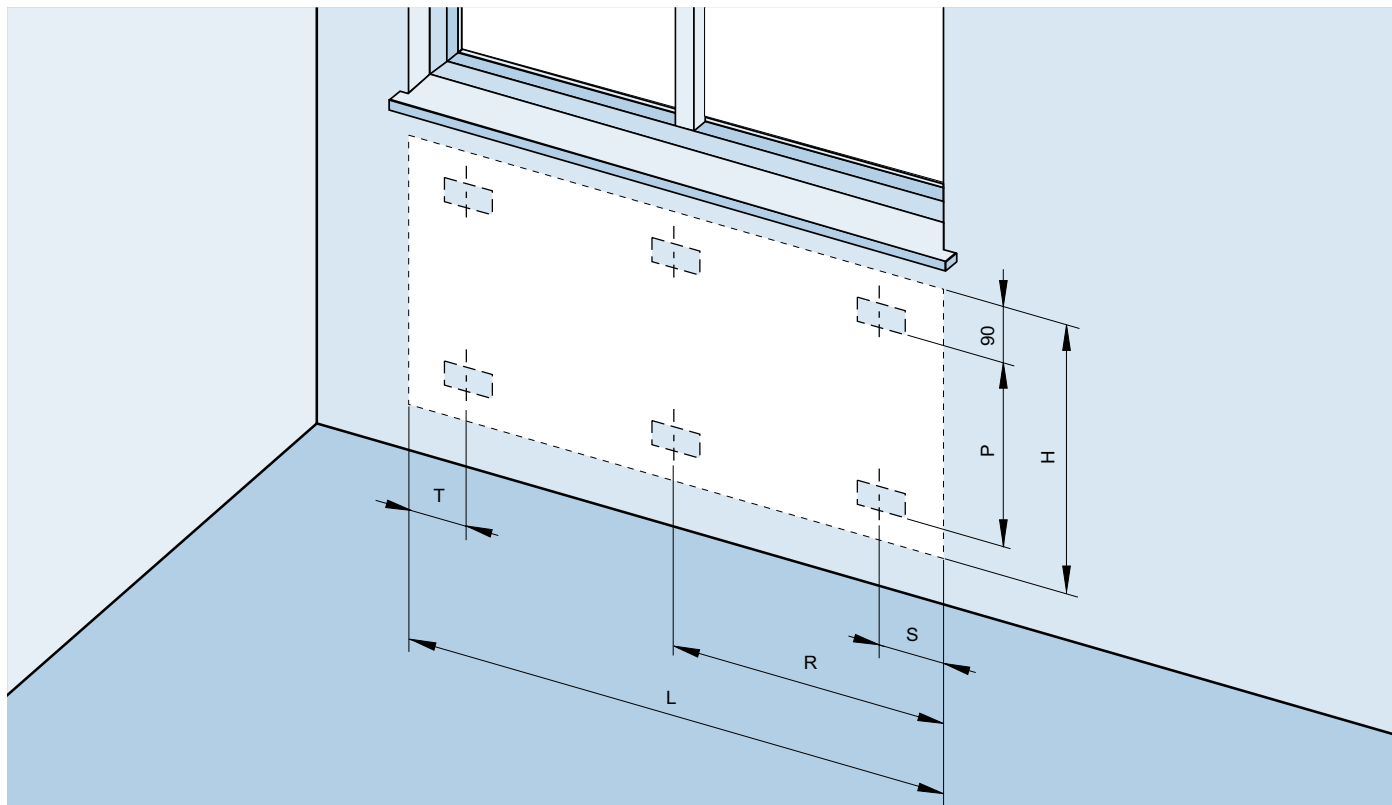


	Type	L [mm]						
		400	500-1600	1800	2000	2300	2600	3000
S [mm]	10 VKM8, 10 HYGIENE VKM8, 10 CLEAN VKM8	167	167	167	167	167	167	167
	10 VKM8 - L	100	133	133	133	133	133	133
	11 (PLAN/LINE) VKM8, 11 (PLAN/LINE) VKM8 - L	117	150	150	150	150	150	150
	20 (PLAN/LINE) VKM8, 20 (PLAN/LINE) VKM8 - L VKM8	133	133	133	133	133	133	133
	20S HYGIENE VKM8, 20S CLEAN VKM8	133	133	133	133	133	133	133
	21 (PLAN/LINE) VKM8, 21 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	22 (PLAN/LINE) VKM8, 22 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	30 HYGIENE VKM8, 30 CLEAN VKM8	133	133	133	133	133	133	133
	33 (PLAN/LINE) VKM8, 33 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	20 VKM8 - U, 21 VKM8 - U, 22 VKM8 - U, 33 VKM8 - U	135	135	135	135	135	135	135
T [mm]	10 VKM8, 10 HYGIENE VKM8, 10 CLEAN VKM8	100	133	133	133	133	133	133
	10 VKM8 - L	167	167	167	167	167	167	167
	11 (PLAN/LINE) VKM8, 11 (PLAN/LINE) VKM8 - L	117	150	150	150	150	150	150
	20 (PLAN/LINE) VKM8, 20 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	20S HYGIENE VKM8, 20S CLEAN VKM8	133	133	133	133	133	133	133
	21 (PLAN/LINE) VKM8, 21 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	22 (PLAN/LINE) VKM8, 22 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	30 HYGIENE VKM8, 30 CLEAN VKM8	133	133	133	133	133	133	133
	33 (PLAN/LINE) VKM8, 33 (PLAN/LINE) VKM8 - L	133	133	133	133	133	133	133
	20 VKM8 - U, 21 VKM8 - U, 22 VKM8 - U, 33 VKM8 - U	135	135	135	135	135	135	135
R [mm]	10 VKM8, 10 VKM8 - L, 10 HYGIENE VKM8, 10 CLEAN VKM8	-	-	900	1000	1133	1300	1500
	11 (PLAN/LINE) VKM8, 11 (PLAN/LINE) VKM8 - L	-	-	900	1000	1133	1300	1500
	20 (PLAN/LINE) VKM8, 20 (PLAN/LINE) VKM8 - L	-	-	900	1000	1133	1300	1500
	20S HYGIENE VKM8, 20S CLEAN VKM8	-	-	900	1000	1133	1300	1500
	21 (PLAN/LINE) VKM8, 21 (PLAN/LINE) VKM8 - L	-	-	900	1000	1133	1300	1500
	22 (PLAN/LINE) VKM8, 22 (PLAN/LINE) VKM8 - L	-	-	900	1000	1133	1300	1500
	30 HYGIENE VKM8, 30 CLEAN VKM8	-	-	900	1000	1133	1300	1500
	33 (PLAN/LINE) VKM8, 33 (PLAN/LINE) VKM8 - L	-	-	900	1000	1133	1300	1500
	20 VKM8 - U, 21 VKM8 - U, 22 VKM8 - U, 33 VKM8 - U	-	-	905	1005	1135	1305	1505
H [mm]		300	400	500	600	700	900	
P [mm]		145	245	345	445	545	745	

MOUNTING OF **RADIK** STEEL PANEL RADIATORS




MOUNTING TEMPLATE



Construction element		Packing unit
Position	Name	Content
1	Sheet metal 100 (intended for all models except for type 33 VKU)	- 10 pcs Sheet metal 100 mm - 20 pcs Dowel plug 12/60 mm - 20 pcs Washer 8,4 mm - 20 pcs Screw 8 × 60 mm - 1 pcs Ruler - Directions for use
2	Sheet metal 155 (intended for all models)	- 10 pcs Sheet metal 155 mm - 20 pcs Dowel plug 12/60 mm - 20 pcs Screw 8 × 60 mm - 1 pcs Ruler - Directions for use
3	Joining component G 1/2 internal	- 10 pcs Joining component G 1/2 internal - 10 pcs Bolt M6 with a wing nut - 10 pcs Washer 6,4 mm - Directions for use
4	Joining component G 3/4 external	- 10 pcs Joining component G 3/4 external - 10 pcs Bolt M6 with a wing nut - 10 pcs Washer 6,4 mm - Directions for use
5	Ruler for the mounting template	- A part of the packing unit - see position 1, 2 (can be ordered as a spare part)

- universal use for all models and types in ventil kompakt, PLAN/LINE ventil kompakt, RADIK PLAN/LINE VERTIKAL - M
- prevents damage of the surface and theft of radiators during construction
- multiple use of the mounting template
- assembly of the complete heating mains in buildings under construction without the radiators
- enables a pressure test on the heating system in buildings under construction
- fixes the connection pipes during construction work (e.g. concreting the floor)
- connecting pitch of the connection pipes remains the same even during finishing work
- using the ruler and mounting instructions, you make preparation of conditions for installation of any wall brackets easier without the presence of the radiators (measuring, drilling holes or fitting dowel plugs into the wall)
- zinc-coated

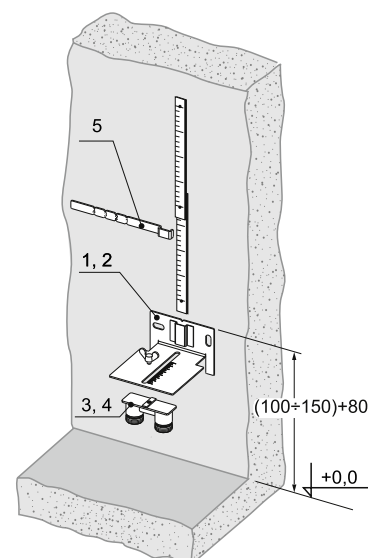

Type	Order number
Sheet metal 100	Z-MS001
Sheet metal 155	Z-MS002
Joining component G 1/2 internal	Z-MS003
Joining component G 3/4 external	Z-MS004
Ruler for the assembly template	Z-ND-010

SUMMARY OF FIXING TECHNOLOGY **RADIK**

Bracket type	Order No	Class according to VDI 6036	Height H [mm]	Dimension D [mm]	MODEL and type															
					VKM8, VKM8 - L						VKM8 - U, VKU				VK, VK - Z, VKL PLAN (LINE) VK PLAN (LINE) VKL					
					10	11	20	21	22	33	20	21	22	33	10	11	20	21	22	33
Simple wall bracket	Z-U320		300–900	40		●	●	●	●	●						●	●	●	●	●
Simple wall bracket - angle	Z-U300		300–900	36/54	●	●	●	●	●	●					●	●	●	●	●	●
Double wall bracket	Z-U562		300	23/43		●	●	●	●	●						●	●	●	●	●
	Z-U563		400			●	●	●	●	●						●	●	●	●	●
	Z-U564		500			●	●	●	●	●						●	●	●	●	●
	Z-U565		600			●	●	●	●	●						●	●	●	●	●
	Z-U567		700			●	●	●	●	●						●	●	●	●	●
	Z-U566		900			●	●	●	●	●						●	●	●	●	●
Double wall bracket MB	Z-U521	3.	300	23/44		● ²⁾	●	●	●	●						● ²⁾	●	●	●	●
	Z-U522		400			● ²⁾	●	●	●	●						● ²⁾	●	●	●	●
	Z-U523		500			● ²⁾	●	●	●	●						● ²⁾	●	●	●	●
	Z-U524		600			● ²⁾	●	●	●	●						● ²⁾	●	●	●	●
	Z-U525		700			● ²⁾	●	●	●	●						● ²⁾	●	●	●	●
	Z-U526		900			● ²⁾	●	●	●	●						● ²⁾	●	●	●	●
Compact bracket	Z-U571	3.	300	43		●	●	●	●	●						●	●	●	●	●
	Z-U572		400			●	●	●	●	●						●	●	●	●	●
	Z-U573		500			●	●	●	●	●						●	●	●	●	●
	Z-U574		600			●	●	●	●	●						●	●	●	●	●
	Z-U577		700			●	●	●	●	●						●	●	●	●	●
	Z-U575		900			●	●	●	●	●						●	●	●	●	●
Compact bracket plus	Z-U-631	2.	300	30			●	●	●	●	●	●	●	●			●	●	●	●
	Z-U-632		400				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U-633		500				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U-634		600				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U-635		700				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U-636		900				●	●	●	●	●	●	●	●			●	●	●	●
Compact bracket P2	Z-U531	3. ¹⁾	300	26/36			●	●	●	●	●	●	●	●			●	●	●	●
	Z-U532		400				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U533		500				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U534		600				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U535		700				●	●	●	●	●	●	●	●			●	●	●	●
	Z-U536		900				●	●	●	●	●	●	●	●			●	●	●	●
Split bracket plus ³⁾	Z-U556 Z-U557		200–900	37–47			●	●	●	●	●	●	●	●			●	●	●	●
Split bracket VERTIKAL	Z-U558	2.	500–2000	40	●	●	●	●	●	●					●	●	●	●	●	●
External stand bracket – set	Z-U210		300–900	-		●	●	●	●	●					●	●	●	●	●	●
External stand bracket – support profile	Z-U220		300	-		●	●	●	●	●					●	●	●	●	●	●
	Z-U230		400			●	●	●	●	●					●	●	●	●	●	●
	Z-U240		500			●	●	●	●	●					●	●	●	●	●	●
	Z-U250		600 (554*)			●	●	●	●	●					●	●	●	●	●	●
	Z-U255		700			●	●	●	●	●					●	●	●	●	●	●
	Z-U260		900			●	●	●	●	●					●	●	●	●	●	●
Stand bracket MB RADIK type 22, 33	Z-U403	3.	200–600	-					● ²⁾	● ²⁾			● ²⁾	● ²⁾					● ¹⁾	● ¹⁾
Internal stand bracket – universal	Z-U331	3.	300–900	-												●	●	●	●	●
Stand bracket for types 22, 33 (high)	Z-U400		200–900	-					● ²⁾	● ²⁾			● ²⁾	● ²⁾					●	●
Stand bracket W RADIK type 22, 33 (low)	Z-U392		200–900	-					● ²⁾	● ²⁾			● ²⁾	● ²⁾					●	●
Stand bracket for types 20, 21 (high)	Z-U390		200–900	-			● ²⁾	● ²⁾				● ²⁾	● ²⁾				●	●		
Stand bracket W RADIK type 20, 21 (low)	Z-U391		200–900	-			● ²⁾	● ²⁾				● ²⁾	● ²⁾				●	●		
Drill-in bracket 15/120	Z-U140		300–900	45–50		●	●	●	●	●						●	●	●	●	●
Drill-in bracket 15/100/70	Z-U141		300–900	65–70	●										●					
Drill-in bracket 18/120	Z-U144		300–900	65–80	●	●	●	●	●	●					●	●	●	●	●	●
Drill-in bracket 18/110/100	Z-U290		300–900	70–100	●	●	●	●	●	●					●	●	●	●	●	●
The radiator is equipped with welded hangers.					A	A	A	A	A	A	N	N	N	N	A	A	A	A	A	A

Key:



can be used
cannot be used

yes
no



* Applies to RADIK KLASIK - R.

¹⁾ Cannot be used for models in the PLAN and LINE design.

²⁾ Cannot be used for models in the VKM8 design with a length of 400 and 500 mm.



MODEL and type																															
MATERNELLE VK MATERNELLE VKL	KLASIK KLASIK - Z PLAN (LINE) KLASIK						KLASIK PLAN (LINE) KLASIK - R				PLAN (LINE) VKM8 PLAN (LINE) VKM8 - L					PLAN (LINE) VERTIKAL - M		CLEAN VKM8 CLEAN VK CLEAN			HYGIENE VKM8 HYGIENE VK HYGIENE			RADIK H = 200 mm		V-POWER		COMBI VK	page		
32	10	11	20	21	22	33	20	21	22	33	11	20	21	22	33	10	20	10	20S	30	10	20S	30	22	33	22	33	22			
		●		●	●	●	●		●	●	●	●	●	●	●												●	●	●	4	
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●											●	●	●	●	4	
	●	●	●	●	●	●					●	●	●	●	●													●	●	5	
	●	●	●	●	●	●					●	●	●	●	●												●	●	●	5	
	●	●	●	●	●	●					●	●	●	●	●												●	●	●	5	
	●	●	●	●	●	●					●	●	●	●	●												●	●	●	5	
	●	●	●	●	●	●					●	●	●	●	●												●	●	●	5	
	●	●	●	●	●	●					●	●	●	●	●												●	●	●	5	
●	●	● ⁶⁾	●	●	●	●					● ⁶⁾	●	●	●	●	●													●	5	
●	●	● ⁶⁾	●	●	●	●					● ⁶⁾	●	●	●	●	●										● ⁴⁾	● ⁴⁾	●	●	5	
●	●	● ⁶⁾	●	●	●	●					● ⁶⁾	●	●	●	●	●										● ⁴⁾	● ⁴⁾	●	●	5	
●	●	● ⁶⁾	●	●	●	●					● ⁶⁾	●	●	●	●	●										● ⁴⁾	● ⁴⁾	●	●	5	
●	●	● ⁶⁾	●	●	●	●					● ⁶⁾	●	●	●	●	●										● ⁴⁾	● ⁴⁾	●	●	5	
●	●	●	●	●	●	●					●	●	●	●	●	●												●	●	6	
●	●	●	●	●	●	●					●	●	●	●	●	●										●	●	●	●	6	
●	●	●	●	●	●	●					●	●	●	●	●	●										●	●	●	●	6	
●	●	●	●	●	●	●					●	●	●	●	●	●										●	●	●	●	6	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	7	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	7	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	7	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	7	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	8	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	8	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	8	
●			●	●	●	●						●	●	●	●	●										●	●	●	●	8	
			●	●	●	●						●	●	●	●	●									● ³⁾	● ³⁾	●	●	●	●	6
	●	●	●	●	●	●					●	●	●	●	●	●	●	●								●	●	●	●	7	
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●		●	●	●	●	10	
	●	●	●	●	●	●					●	●	●	●	●	●			●	●	●		●	●			●	●	●	●	10
	●	●	●	●	●	●					●	●	●	●	●	●			●	●	●	●	●	●			●	●	●	●	10
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●			●	●	●	●	10
	●	●	●	●	●	●					●	●	●	●	●	●			●	●	●	●	●	●			●	●	●	●	10
●					● ¹⁾	● ¹⁾				● ¹⁾	● ¹⁾								● ²⁾	● ²⁾		● ²⁾	● ²⁾	● ¹⁾	● ¹⁾					10	
●		●	●	●	●	●	●	●	●	●									●	●		●	●							9	
					●	●				●	●			● ²⁾	● ²⁾				● ²⁾	● ²⁾	● ²⁾	● ²⁾	●	●	● ²⁾	● ²⁾				12	
				●	●				●	●				● ²⁾	● ²⁾				● ²⁾	● ²⁾	● ²⁾	● ²⁾	●	●	● ²⁾	● ²⁾				11	
			●	●			●	●				● ²⁾	● ²⁾																	12	
			●	●			●	●				● ²⁾	● ²⁾																	11	
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●											●	●			14	
	●	●	●	●	●	●					●																●	●			14
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●			●	●			15	
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●			●	●			15	
A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	N	N	A	A	A			

³⁾ Brackets are included in the package, set Z-U556 contains 2 pieces for L > 1800 mm, set Z-U557 contains 3 pieces for L > 1800 mm.

⁴⁾ Wall brackets are included in the delivery.

⁵⁾ In combination with the safety set P2-70 (Z-U538).

⁶⁾ Not applicable from a length of 2,000 mm and more.



KORAMONT	KORAMONT	KORAMONT	KORAMONT
KORAMONT	KORAMONT	KORADO, a.s. Bří Hubálků 869 560 02 Česká Třebová Czech Republic e-mail: info@korado.cz www.korado.com Ev. č.: 8/26.08.21 EN	KORAMONT
KORAMONT	KOI		KORAMONT
KORAMONT	KOI		KORAMONT
KORAMONT	KOI		KORAMONT
KORAMONT	KOI		KORAMONT