




TOWEL RAIL RADIATORS WITH ELECTRIC BOOSTER

NEW · NEW · NEW · NEW · NEW

We extend our existing range of towel rail and design radiators with a new range of towel rail and design radiators with electric booster.

KORATHERM AQUAPANEL B, KORALUX LINEAR MAX B, KORALUX LINEAR COMFORT B
(combined radiators with electric booster)

Design radiators KORATHERM AQUAPANEL B and towel rail radiators KORALUX LINEAR MAX B and KORALUX LINEAR COMFORT B are connected to hot water heating system and supplemented with an electric booster. This creates a radiator for combined heating (hot water - electricity) and can then be used at any time without depending on the operation of the heating system. The electric radiator is connected with a connection cable with a plug for connection to the socket.

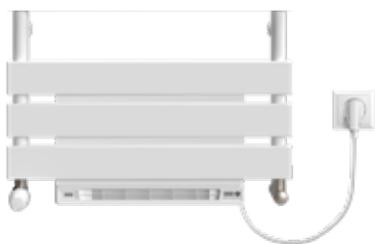

KORATHERM AQUAPANEL B




KORALUX LINEAR MAX B



KORALUX LINEAR COMFORT B

KORATHERM AQUAPANEL B-ER, KORALUX LINEAR MAX B-ER, KORALUX LINEAR COMFORT B-ER
(direct electric radiators with electric booster)

The direct electric radiators in the B-ER design are equipped with an electric heating element and an electric booster with an electronic room temperature controller. The direct radiators are supplied in white RAL 9016, the part includes an electric heating element and an electric booster with a white connecting cable with a plug for connecting to a socket.

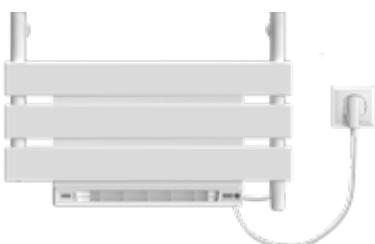

KORATHERM AQUAPANEL B-ER



KORALUX LINEAR MAX B-ER



KORALUX LINEAR COMFORT B-ER

TOWEL RAIL RADIATORS WITH ELECTRIC BOOSTER



Electric boosters - technical data


Specifications	KORATHERM AQUAPANEL B KORALUX LINEAR MAX B KORALUX COMFORT B	KORATHERM AQUAPANEL BER KORALUX LINEAR MAX BER KORALUX COMFORT BER
Switch	✓	✓
Operation indication	✓	✓
Fault status indication	✓	✓
Temperature controller	✓	✓
Weekly program	✓	✓
Temperature limiter	✓	✓
Operating mode selection	✓	✓
Rated voltage	230 V / 50 Hz	230 V / 50 Hz
Power input range	950 W	950 W a 500 ÷ 1 000 W
Protection	IP 24	IP 24
Appliance class	2	2
Connection cable length	1,2 m	1,2 m
Working position	Vertical with power supply at the bottom	Vertical with power supply at the bottom

Optional accessories


To increase user comfort, the electric booster can be supplemented with a wireless room thermostat. After installation and pairing, the thermostat serves as a full-fledged control unit.

Features:


- coordinated by design
- with electric booster
- battery power supply 2x 1.5 V
- accurate temperature measurement
- large controls
- backlit display




K10AB



K10ABER



KLMB, KLTB



KLMBER, KLTBER



KORATHERM AQUAPANEL B



KORATHERM AQUAPANEL B-ER



KORALUX LINEAR MAX B



KORALUX LINEAR MAX B-ER



KORALUX LINEAR COMFORT B



KORALUX LINEAR COMFORT B-ER